



ENJOY YOUR TRIPS WITH WINDFORCE TYRES

2026 · CATALOGUE UPGRADE



CONTENES

PASSENGER CAR, 4x4/4WD/SUV AND COMMERCIAL VAN



Fearless Progress, Steering into a New Era

No adventure without risk, no driving without safeguarding. On the way to the future, WINDFORCE is always upgrading and around you.

WINDFORCE brand, since 2012, unremitting team efforts and innovation, has developed 1200 tire sizes covering PCR, UHP, SUV, 4 x 4, VAN, WINTER, ALL SEASON, etc.

WINDFORCE provides safety and value for the global customers, is constantly striving to create the best solutions for each application.

WINDFORCE provides a wide variety of PCR/TBR to customers, based on the demand from local market.

WINDFORCE persists on green tires to protect the environment in a concept of low carbon development and lowers the rolling resistance of tires.

WINDFORCE supplied by global TOP 10 manufacturer, has perfect quality supervision system, after-sales system and quality certification system to guarantee the product quality and improve the customer satisfaction.

PASSENGER CAR



ADVANFORS TOURING01



ADVANFORS HIP03



ADVANFORS UHP II05

4X4/4WD/SUV



ADVANFORS SUV11



ADVANFORS A/T13



ADVANFORS A/T II15

COMMERCIAL VAN




ADVANFORS MAX19

WINDFORCE TYRE POSITIONING MAP



PASSENGER CAR

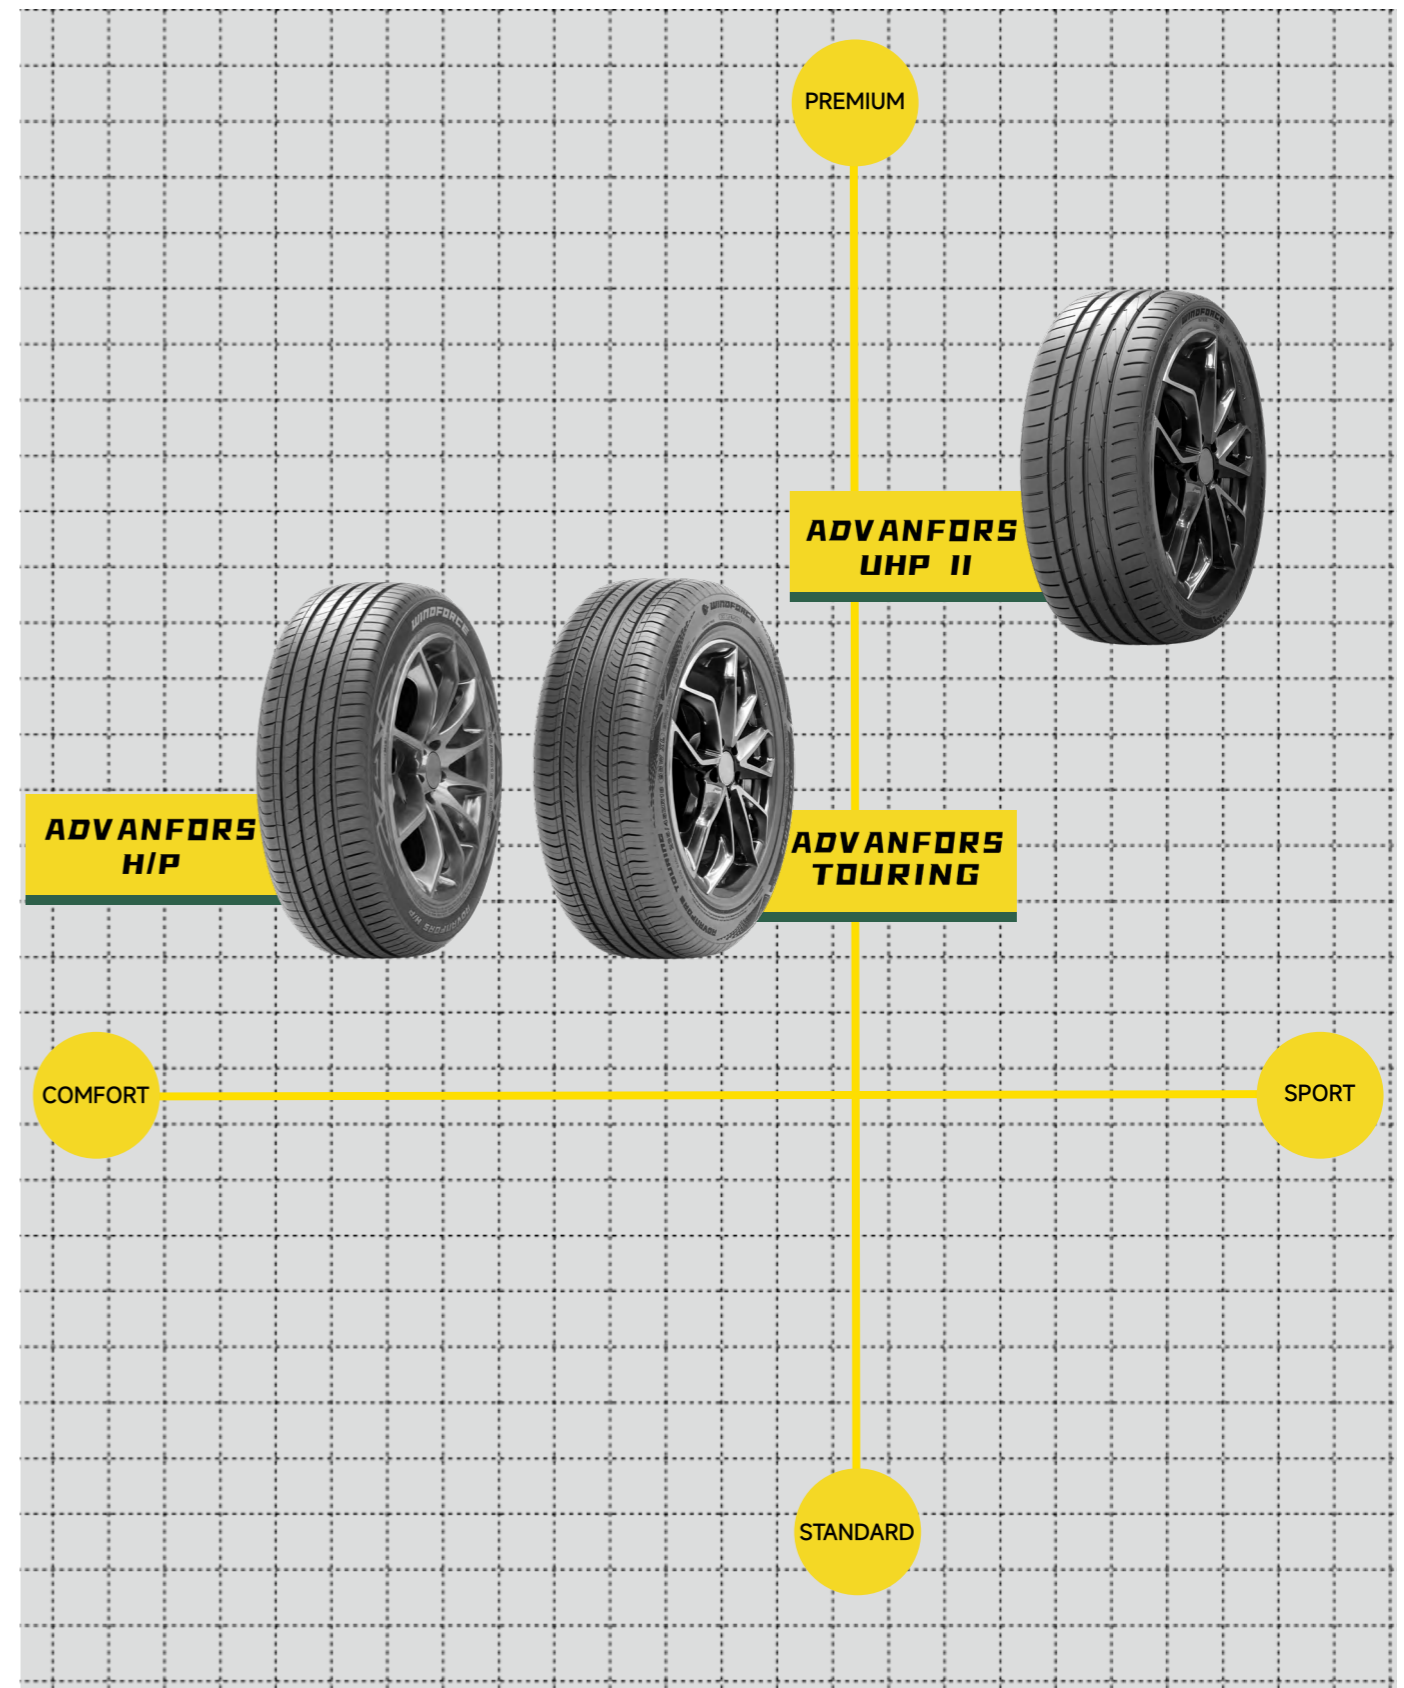

ADVANFORS TOURING

Classical symmetric tread & advanced compound tech balance handling, treadwear, and ride comfort, suitable for all-around touring tyre drivers.

Features & benefits

- The tyre's casing is constructed with two steel belts reinforced by spirally wrapped nylon for enhanced strength and durability. This construction helps maintain the tyre's shape and provides a smooth, comfortable ride while also improving high-speed stability and handling precision.
- Symmetric tread design with multiple grooves and sipes for wet weather confidence.
- TRI-PLEX TREAD COMPOUND, silica-enhanced all-season formulation, for lower rolling resistance for good fuel efficiency.

UTQG: 420 A A M+S



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	155/65R13	73	T		BSW	TL	✓	532	157	4.5
	155/70R13	75	T		BSW	TL	✓	548	157	4.5
	155/80R13	79	T		BSW	TL	✓	578	157	4.5
	165/65R13	77	T		BSW	TL	✓	544	170	5.0
	165/70R13	79	T		BSW	TL	✓	562	170	5.0
	165/80R13	83	T		BSW	TL	✓	594	165	4.5
	175/60R13	77	T		BSW	TL	✓	540	177	5.0
	175/70R13	82	T		BSW	TL	✓	576	177	5.0
	175/75R13	85	T		BSW	TL	✓	592	177	5.0
	185/70R13	86	T		BSW	TL	✓	590	189	5.5
14	165/55R14	72	T		BSW	TL	✓	538	170	5.0
	165/60R14	75	H		BSW	TL	✓	554	170	5.0
	165/65R14	79	H		BSW	TL	✓	570	170	5.0
	165/70R14	81	T		BSW	TL	✓	588	170	5.0
	175/65R14	82	H		BSW	TL	✓	584	177	5.0
	175/70R14	84	T		BSW	TL	✓	602	177	5.0
	175/75R14	87	T		BSW	TL	✓	618	177	5.0
	185/60R14	82	H		BSW	TL	✓	578	189	5.5
	185/65R14	86	H		BSW	TL	✓	596	189	5.5
	185/70R14	88	T		BSW	TL	✓	616	189	5.5

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
14	195/60R14	86	H		BSW	TL	✓	590	201	6.0
	195/70R14	91	T		BSW	TL	✓	630	201	6.0
	205/60R14	88	H		BSW	TL	✓	602	209	6.0
	205/70R14	95	T		BSW	TL	✓	644	209	6.0
15	175/50R15	75	H		BSW	TL	✓	557	182	5.5
	175/60R15	81	H		BSW	TL	✓	591	177	5.0
	175/65R15	84	H		BSW	TL	✓	609	177	5.0
	185/55R15	82	V		BSW	TL	✓	585	194	6.0
	185/60R15	84	H		BSW	TL	✓	603	189	5.5
	185/65R15	88	H		BSW	TL	✓	621	189	5.5
	195/50R15	82	V		BSW	TL	✓	577	201	6.0
	195/55R15	85	V		BSW	TL	✓	595	201	6.0
	195/60R15	88	V		BSW	TL	✓	615	201	6.0
	195/65R15	91	V		BSW	TL	✓	635	201	6.0
	205/60R15	91	H		BSW	TL	✓	627	209	6.0
	205/65R15	94	V		BSW	TL	✓	647	209	6.0
205/70R15	96	H		BSW	TL	✓	669	209	6.0	
215/70R15	98	H		BSW	TL	✓	683	221	6.5	
16	185/55R16	83	V		BSW	TL	✓	610	194	6.0
	195/50R16	84	V		BSW	TL	✓	602	201	6.0
	195/55R16	87	V		BSW	TL	✓	620	201	6.0
	195/60R16	89	H		BSW	TL	✓	640	201	6.0
	205/45ZR16	87	W	XL	BSW	TL	✓	590	206	7.0
	205/50R16	91	V	XL	BSW	TL	✓	612	214	6.5
	205/55R16	91	V		BSW	TL	✓	632	214	6.5
	205/55ZR16	94	W	XL	BSW	TL	✓	632	214	6.5
	205/60R16	92	V		BSW	TL	✓	652	209	6.0
	205/65R16	95	H		BSW	TL	✓	672	209	6.0
	215/45ZR16	90	W	XL	BSW	TL	✓	600	213	7.0
	215/55R16	97	V	XL	BSW	TL	✓	642	226	7.0
	215/60R16	99	V	XL	BSW	TL	✓	664	221	6.5
	215/65R16	98	V		BSW	TL	✓	686	221	6.5
225/55R16	99	V	XL	BSW	TL	✓	654	233	7.0	
225/60R16	98	H		BSW	TL	✓	676	228	6.5	
235/60R16	100	H		BSW	TL	✓	688	240	7.0	
17	195/40ZR17	81	W	XL	BSW	TL	✓	588	200	7.0
	195/45ZR17	85	W	XL	BSW	TL	✓	608	195	6.5
	205/40ZR17	84	W	XL	BSW	TL	✓	596	212	7.5
	205/45ZR17	88	W	XL	BSW	TL	✓	616	206	7.0
	205/50ZR17	93	W	XL	BSW	TL	✓	638	214	6.5
	205/55ZR17	95	W	XL	BSW	TL	✓	658	214	6.5
	215/45ZR17	91	W	XL	BSW	TL	✓	626	213	7.0
	215/50ZR17	95	W	XL	BSW	TL	✓	648	226	7.0
	215/55ZR17	98	W	XL	BSW	TL	✓	668	226	7.0
	225/45ZR17	94	W	XL	BSW	TL	✓	634	225	7.5
225/50ZR17	98	W	XL	BSW	TL	✓	658	233	7.0	
225/55ZR17	101	W	XL	BSW	TL	✓	680	233	7.0	
235/45ZR17	97	W	XL	BSW	TL	✓	644	236	8.0	
235/55ZR17	103	W	XL	BSW	TL	✓	690	245	7.5	
18	215/40ZR18	89	W	XL	BSW	TL	✓	629	218	7.5
	215/45ZR18	93	W	XL	BSW	TL	✓	651	213	7.0
	225/40ZR18	92	W	XL	BSW	TL	✓	637	230	8.0
	225/45ZR18	95	W	XL	BSW	TL	✓	659	225	7.5
	235/40ZR18	95	W	XL	BSW	TL	✓	645	241	8.5
	235/45ZR18	98	W	XL	BSW	TL	✓	669	236	8.0
	245/40ZR18	97	W	XL	BSW	TL	✓	653	248	8.5
	245/45ZR18	100	W	XL	BSW	TL	✓	677	243	8.0
	255/40ZR18	99	W	XL	BSW	TL	✓	661	260	9.0
	255/45ZR18	103	W	XL	BSW	TL	✓	687	255	8.5

ADVANFORS H/P

The summer tyre ADVANFORS H/P, is designed to provide you safety all the while and to offer the best longevity in its category.

Features & benefits

- Non-symmetric from outside to inside for high-class performance. With close stiffness of two shoulders design, more freedom is allowed .
- High performance compound and optimal block/void ratio ensures for great dry braking and handling.
- The calculation of circumferential grooves for the series can efficiently avoid aquaplaning and delivering a strong brake performance.

UTQG: 400 A A



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	145/70R13	71	T		BSW	TL	✓	534	150	4.5
	145/80R13	75	T		BSW	TL	✓	562	145	4.0
	155/65R13	73	T		BSW	TL	✓	532	157	4.5
	155/70R13	75	T		BSW	TL	✓	548	157	4.5
	155/80R13	79	T		BSW	TL	✓	578	157	4.5
	165/65R13	77	T		BSW	TL	✓	544	170	5.0
	165/70R13	79	T		BSW	TL	✓	562	170	5.0
	175/70R13	82	T		BSW	TL	✓	576	177	5.0
	175/75R13	85	T		BSW	TL	✓	592	177	5.0
14	155/65R14	75	T		BSW	TL	✓	558	157	4.5
	165/60R14	75	H		BSW	TL	✓	554	170	5.0
	165/65R14	79	T		BSW	TL	✓	570	170	5.0
	165/70R14	81	T		BSW	TL	✓	588	170	5.0
	165/70R14	85	T	XL	BSW	TL	✓	588	170	5.0
	175/65R14	82	H		BSW	TL	✓	584	177	5.0
	175/65R14	86	T	XL	BSW	TL	✓	584	177	5.0

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
14	175/70R14	84	T		BSW	TL	✓	602	177	5.0
	175/70R14	88	T	XL	BSW	TL	✓	602	177	5.0
	175/75R14	87	T		BSW	TL	✓	618	177	5.0
	185/60R14	82	H		BSW	TL	✓	578	189	5.5
	185/65R14	86	H		BSW	TL	✓	596	189	5.5
	185/70R14	88	T		BSW	TL	✓	616	189	5.5
	195/70R14	91	T		BSW	TL	✓	630	201	6.0
15	155/60R15	74	T		BSW	TL	✓	567	157	4.5
	165/60R15	81	T	XL	BSW	TL	✓	579	170	5.0
	165/65R15	81	T		BSW	TL	✓	595	170	5.0
	175/55R15	77	H		BSW	TL	✓	573	182	5.5
	175/60R15	81	H		BSW	TL	✓	591	177	5.0
	175/65R15	84	H		BSW	TL	✓	609	177	5.0
	185/55R15	82	V		BSW	TL	✓	585	194	6.0
	185/60R15	84	H		BSW	TL	✓	603	189	5.5
	185/60R15	88	H	XL	BSW	TL	✓	603	189	5.5
	185/65R15	88	H		BSW	TL	✓	621	189	5.5
	185/65R15	92	T	XL	BSW	TL	✓	621	189	5.5
	195/50R15	82	V		BSW	TL	✓	577	201	6.0
	195/55R15	85	V		BSW	TL	✓	595	201	6.0
	195/60R15	88	H		BSW	TL	✓	615	201	6.0
	195/60R15	88	V		BSW	TL	✓	615	201	6.0
	195/65R15	91	V		BSW	TL	✓	635	201	6.0
	195/65R15	95	H	XL	BSW	TL	✓	635	201	6.0
	205/60R15	91	V		BSW	TL	✓	627	209	6.0
205/65R15	94	V		BSW	TL	✓	647	209	6.0	
215/65R15	96	H		BSW	TL	✓	661	221	6.5	
16	185/55R16	87	V	XL	BSW	TL	✓	610	194	6.0
	195/50R16	84	V		BSW	TL	✓	602	201	6.0
	195/55R16	87	V		BSW	TL	✓	620	201	6.0
	195/55R16	91	V	XL	BSW	TL	✓	620	201	6.0
	195/60R16	89	H		BSW	TL	✓	640	201	6.0
	205/55R16	91	V		BSW	TL	✓	632	214	6.5
	205/55R16	91	W		BSW	TL	✓	632	214	6.5
	205/60R16	92	V		BSW	TL	✓	652	209	6.0
	205/60R16	96	V	XL	BSW	TL	✓	652	209	6.0
	215/55R16	97	W	XL	BSW	TL	✓	642	226	7.0
	215/60R16	95	V		BSW	TL	✓	664	221	6.5
	215/60R16	99	V	XL	BSW	TL	✓	664	221	6.5
	215/65R16	98	H		BSW	TL	✓	686	221	6.5
	215/70R16	100	H		BSW	TL	✓	708	221	6.5
	225/55R16	99	W	XL	BSW	TL	✓	654	233	7.0
225/60R16	98	H		BSW	TL	✓	676	228	6.5	
225/60R16	102	V	XL	BSW	TL	✓	676	228	6.5	
225/70R16	107	H	XL	BSW	TL	✓	722	228	6.5	
235/60R16	100	H		BSW	TL	✓	688	240	7.0	

ADVANFORS UHP II

Highly stylish designed and engineered specially for various luxury sedans and EVs.

Features & benefits

- Sporty and stylish HP/UHP non-symmetric tread pattern design. Logic control of transition from inside to outside for excellent wet/dry performance.
- Continuous ribs and reinforced two shoulders design for high-speed stability and uniform treadwear.
- "Golf theory" application to the walls of 4-wide circumferential grooves increase water evacuation decrease noise level.
- Different-size pitches design and alignment effectively lowering rolling noise and improving driving comfort.

M+S



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	*195/45R16	84	V	XL	BSW	TL	✓	582	195	6.5
	195/55R16	91	V	XL	BSW	TL	✓	620	201	6.0
	*205/45ZR16	87	W	XL	BSW	TL	✓	590	206	7.0
	205/55ZR16	94	W	XL	BSW	TL	✓	632	214	6.5
	205/60R16	96	V	XL	BSW	TL	✓	652	209	6.0
	*215/45R16	90	V	XL	BSW	TL	✓	600	213	7.0
	215/55ZR16	97	W	XL	BSW	TL	✓	642	226	7.0
	225/55ZR16	99	W	XL	BSW	TL	✓	654	233	7.0
	17	*205/40ZR17	84	W	XL	BSW	TL	✓	596	212
205/45ZR17		88	W	XL	BSW	TL	✓	616	206	7.0
205/50ZR17		93	W	XL	BSW	TL	✓	638	241	6.5
205/55ZR17		95	W	XL	BSW	TL	✓	658	214	6.5
*215/40ZR17		87	W	XL	BSW	TL	✓	604	218	7.5
215/45ZR17		91	W	XL	BSW	TL	✓	626	213	7.0

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
17	215/50ZR17	95	W	XL	BSW	TL	✓	648	226	7.0
	215/55ZR17	98	W	XL	BSW	TL	✓	668	226	7.0
	215/60R17	100	V	XL	BSW	TL	✓	690	221	6.5
	*215/65R17	103	V	XL	BSW	TL	✓	712	221	6.5
	225/45ZR17	94	W	XL	BSW	TL	✓	634	225	7.5
	225/50ZR17	98	W	XL	BSW	TL	✓	658	233	7.0
	225/55ZR17	101	W	XL	BSW	TL	✓	680	233	7.0
	225/60R17	103	V	XL	BSW	TL	✓	702	228	6.5
	225/65R17	102	V		BSW	TL	✓	724	228	6.5
	235/45ZR17	97	W	XL	BSW	TL	✓	644	236	8.0
	235/50ZR17	100	W	XL	BSW	TL	✓	668	245	7.5
	235/55ZR17	103	W	XL	BSW	TL	✓	690	245	7.5
	*235/60R17	102	V		BSW	TL	✓	714	240	7.0
	*235/65R17	108	V	XL	BSW	TL	✓	738	240	7.0
	245/40ZR17	95	W	XL	BSW	TL	✓	628	248	8.5
	245/45ZR17	99	W	XL	BSW	TL	✓	652	243	8.0
18	215/40ZR18	89	W	XL	BSW	TL	✓	629	218	7.5
	215/45ZR18	93	W	XL	BSW	TL	✓	651	213	7.0
	215/50ZR18	96	W	XL	BSW	TL	✓	673	226	7.0
	215/55ZR18	99	W	XL	BSW	TL	✓	693	226	7.0
	225/40ZR18	92	W	XL	BSW	TL	✓	637	230	8.0
	225/45ZR18	95	W	XL	BSW	TL	✓	659	225	7.5
	225/50ZR18	99	W	XL	BSW	TL	✓	683	233	7.0
	225/55ZR18	102	W	XL	BSW	TL	✓	705	233	7.0
	225/60R18	104	V	XL	BSW	TL	✓	727	228	6.5
	235/40ZR18	95	W	XL	BSW	TL	✓	645	241	8.5
	235/45ZR18	98	W	XL	BSW	TL	✓	669	236	8.0
	235/50ZR18	101	W	XL	BSW	TL	✓	693	245	7.5
	235/55ZR18	104	W	XL	BSW	TL	✓	715	245	7.5
	235/60R18	107	V	XL	BSW	TL	✓	739	240	7.0
	245/35ZR18	92	W	XL	BSW	TL	✓	629	248	8.5
	245/40ZR18	97	W	XL	BSW	TL	✓	653	248	8.5
	245/45ZR18	100	W	XL	BSW	TL	✓	677	243	8.0
	245/50ZR18	104	W	XL	BSW	TL	✓	703	253	7.5
255/35ZR18	94	W	XL	BSW	TL	✓	635	260	9.0	
255/40ZR18	99	W	XL	BSW	TL	✓	661	260	9.0	
255/45ZR18	103	W	XL	BSW	TL	✓	687	255	8.5	
255/55ZR18	109	W	XL	BSW	TL	✓	737	265	8.0	
*265/35ZR18	97	W	XL	BSW	TL	✓	643	271	9.5	
275/40ZR18	103	W	XL	BSW	TL	✓	677	278	9.5	

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
19	225/40ZR19	93	W	XL	BSW	TL	✓	663	230	8.0
	225/45ZR19	96	W	XL	BSW	TL	✓	685	225	7.5
	225/55ZR19	103	W	XL	BSW	TL	✓	731	233	7.0
	235/35ZR19	91	W	XL	BSW	TL	✓	647	241	8.5
	235/40ZR19	96	W	XL	BSW	TL	✓	671	241	8.5
	235/45ZR19	99	W	XL	BSW	TL	✓	695	236	8.0
	235/50ZR19	103	W	XL	BSW	TL	✓	719	245	7.5
	235/55ZR19	105	W	XL	BSW	TL	✓	741	245	7.5
	245/35ZR19	93	W	XL	BSW	TL	✓	655	248	8.5
	245/40ZR19	98	W	XL	BSW	TL	✓	679	248	8.5
	245/45ZR19	102	W	XL	BSW	TL	✓	703	243	8.0
	245/50ZR19	105	W	XL	BSW	TL	✓	729	253	7.5
	245/55ZR19	107	W	XL	BSW	TL	✓	753	253	7.5
	255/35ZR19	96	W	XL	BSW	TL	✓	661	260	9.0
	255/40ZR19	100	W	XL	BSW	TL	✓	687	260	9.0
	255/45ZR19	104	W	XL	BSW	TL	✓	713	255	8.5
	255/50ZR19	107	W	XL	BSW	TL	✓	739	265	8.0
	255/55ZR19	111	W	XL	BSW	TL	✓	763	265	8.0
	255/60R19	113	V	XL	BSW	TL	✓	789	260	7.5
	265/50ZR19	110	W	XL	BSW	TL	✓	749	277	8.5
275/35ZR19	100	W	XL	BSW	TL	✓	675	278	9.5	
275/40ZR19	105	W	XL	BSW	TL	✓	703	278	9.5	
275/45ZR19	108	W	XL	BSW	TL	✓	731	273	9.0	
285/45ZR19	111	W	XL	BSW	TL	✓	739	285	9.5	
20	235/50ZR20	104	W	XL	BSW	TL	✓	744	245	7.5
	*235/55ZR20	105	W	XL	BSW	TL	✓	766	245	7.5
	245/35ZR20	95	W	XL	BSW	TL	✓	680	248	8.5
	245/40ZR20	99	W	XL	BSW	TL	✓	704	248	8.5
	245/45ZR20	103	W	XL	BSW	TL	✓	728	243	8.0
	245/50ZR20	102	W	XL	BSW	TL	✓	754	253	7.5
	*255/35ZR20	97	W	XL	BSW	TL	✓	686	260	9.0
	255/40ZR20	101	W	XL	BSW	TL	✓	712	260	9.0
	255/45ZR20	105	W	XL	BSW	TL	✓	738	255	8.5
	255/50ZR20	109	W	XL	BSW	TL	✓	764	265	8.0
	255/55ZR20	110	W	XL	BSW	TL	✓	788	265	8.0
	265/40ZR20	104	W	XL	BSW	TL	✓	720	271	9.5
	265/45ZR20	108	W	XL	BSW	TL	✓	746	266	9.0
	265/50ZR20	111	W	XL	BSW	TL	✓	774	277	8.5
	275/30ZR20	97	W	XL	BSW	TL	✓	674	278	9.5
	275/35ZR20	102	W	XL	BSW	TL	✓	700	278	9.5
	275/40ZR20	106	W	XL	BSW	TL	✓	728	278	9.5
	275/45ZR20	110	W	XL	BSW	TL	✓	756	273	9.0
	275/50ZR20	113	W	XL	BSW	TL	✓	784	284	8.5
	275/55ZR20	117	W	XL	BSW	TL	✓	810	284	8.5
285/45ZR20	112	W	XL	BSW	TL	✓	764	285	9.5	
285/50ZR20	116	W	XL	BSW	TL	✓	794	297	9.0	
305/40ZR20	112	W	XL	BSW	TL	✓	752	313	11.0	
315/35ZR20	110	W	XL	BSW	TL	✓	728	320	11.0	

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
21	255/45ZR21	106	W	XL	BSW	TL	✓	763	255	8.5
	265/45ZR21	108	W	XL	BSW	TL	✓	771	266	9.0
	275/40ZR21	107	W	XL	BSW	TL	✓	753	278	9.5
	275/45ZR21	110	W	XL	BSW	TL	✓	781	273	9.0
	285/35ZR21	105	W	XL	BSW	TL	✓	733	290	10.0
	*285/40ZR21	109	W	XL	BSW	TL	✓	761	290	10.0
	285/45ZR21	113	W	XL	BSW	TL	✓	789	285	9.5
	*295/35ZR21	107	W	XL	BSW	TL	✓	739	301	10.5
	*295/40ZR21	111	W	XL	BSW	TL	✓	769	301	10.5
	315/35ZR21	111	W	XL	BSW	TL	✓	753	320	11.0
22	275/40ZR22	107	W	XL	BSW	TL	✓	779	278	9.5
	315/35ZR22	111	W	XL	BSW	TL	✓	779	320	11.0


*UNDER DEVELOPMENT



WINDFORCE TYRE POSITIONING MAP



4X4/4WD/SUV

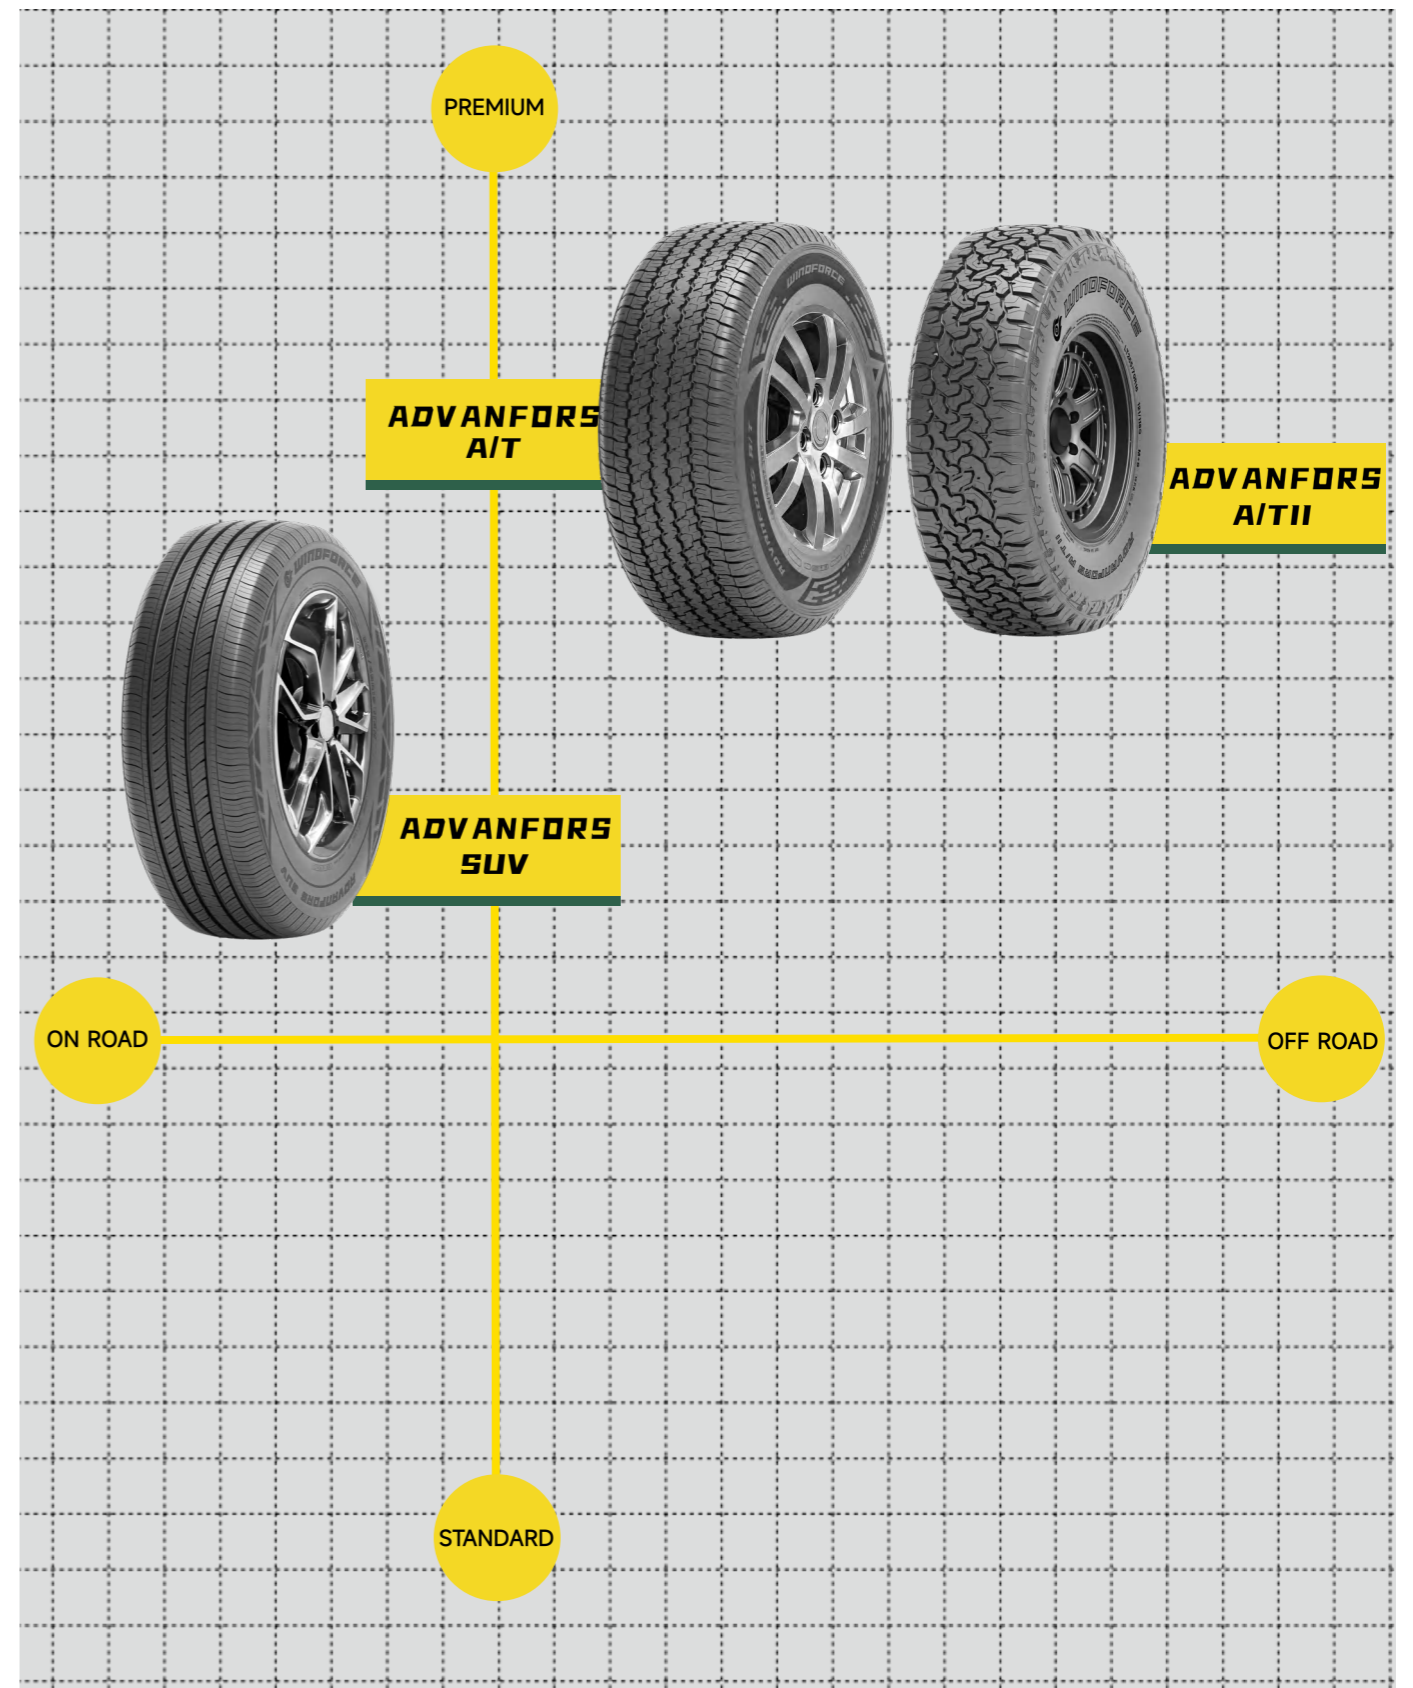

ADVANFORS SUV

Thanks to the new generation of year-round compounding technologies, ADVANFORS SUV delivering excellent wet braking performance, integrated within the tread pattern design evacuates water effectively for enhanced wet grip.

Features & benefits

- Stylish and strong shoulder design to form enough ground contact in the outer area for crisp cornering.
- Wide longitudinal grooves and shoulder lateral opening provide optimum drainage when driving straight ahead.
- The whole 3-D edges design for smooth tread block entry in footprint to improve acoustic comfort.
- Specifically for high performance electric and plug-in vehicles.

UTQG: 460 A A M+S



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
15	215/75R15	100	T		BSW	TL	✓	703	216	6.0
	235/75R15	109	T	XL	BSW	TL	✓	733	235	6.5
16	215/70R16	100	H		BSW	TL	✓	708	221	6.5
	225/70R16	107	H	XL	BSW	TL	✓	722	228	6.5
	235/70R16	106	H		BSW	TL	✓	736	240	7.0
	245/70R16	111	H	XL	BSW	TL	✓	750	248	7.0
	255/65R16	109	H		BSW	TL	✓	738	260	7.5
	255/70R16	111	H		BSW	TL	✓	764	260	7.5
	265/70R16	112	H		BSW	TL	✓	778	272	8.0
17	275/70R16	114	H		BSW	TL	✓	792	279	8.0
	215/60R17	100	V	XL	BSW	TL	✓	690	221	6.5
	215/65R17	99	H		BSW	TL	✓	712	221	6.5
	225/60R17	103	V	XL	BSW	TL	✓	702	228	6.5

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
17	225/65R17	102	H		BSW	TL	✓	724	228	6.5
	235/60R17	106	V	XL	BSW	TL	✓	714	240	7.0
	235/65R17	108	H	XL	BSW	TL	✓	738	240	7.0
	245/65R17	111	H	XL	BSW	TL	✓	750	248	7.0
	255/65R17	110	H		BSW	TL	✓	764	260	7.5
	265/65R17	112	H		BSW	TL	✓	776	272	8.0
	265/70R17	115	H		BSW	TL	✓	804	272	8.0
	275/65R17	115	H		BSW	TL	✓	790	279	8.0
	285/65R17	116	H		BSW	TL	✓	802	292	8.5
18	215/50R18	92	V		BSW	TL	✓	673	226	7.0
	215/55R18	99	V	XL	BSW	TL	✓	693	226	7.0
	225/50R18	95	V		BSW	TL	✓	683	233	7.0
	225/55R18	98	V		BSW	TL	✓	705	233	7.0
	225/60R18	104	V	XL	BSW	TL	✓	727	228	6.5
	235/50R18	101	V	XL	BSW	TL	✓	693	245	7.5
	235/55R18	100	V		BSW	TL	✓	715	245	7.5
	235/60R18	107	V	XL	BSW	TL	✓	739	240	7.0
	235/65R18	110	H	XL	BSW	TL	✓	763	240	7.0
	245/60R18	105	H		BSW	TL	✓	751	248	7.0
	255/55R18	109	V	XL	BSW	TL	✓	737	265	8.0
	255/60R18	112	V	XL	BSW	TL	✓	763	260	7.5
	255/70R18	113	H		BSW	TL	✓	815	260	7.5
	265/60R18	114	V	XL	BSW	TL	✓	775	272	8.0
	265/65R18	114	H		BSW	TL	✓	801	272	8.0
	265/70R18	116	H		BSW	TL	✓	829	272	8.0
275/65R18	116	H		BSW	TL	✓	815	279	8.0	
285/60R18	116	H		BSW	TL	✓	799	292	8.5	
19	225/55R19	103	V	XL	BSW	TL	✓	731	233	7.0
	235/50R19	103	V	XL	BSW	TL	✓	719	245	7.5
	235/55R19	105	V	XL	BSW	TL	✓	741	245	7.5
	245/55R19	107	V	XL	BSW	TL	✓	753	253	7.5
	255/45R19	104	V	XL	BSW	TL	✓	713	255	8.5
	255/50R19	107	V	XL	BSW	TL	✓	739	265	8.0
	255/55R19	111	V	XL	BSW	TL	✓	763	265	8.0
	265/55R19	109	V		BSW	TL	✓	775	277	8.5
20	235/55R20	105	V	XL	BSW	TL	✓	766	245	7.5
	245/45R20	103	V	XL	BSW	TL	✓	728	243	8.0
	245/50R20	102	V		BSW	TL	✓	754	253	7.5
	255/45R20	105	V	XL	BSW	TL	✓	738	255	8.5
	255/50R20	109	V	XL	BSW	TL	✓	764	265	8.0
	255/55R20	110	V	XL	BSW	TL	✓	788	265	8.0
	265/50R20	111	V	XL	BSW	TL	✓	774	277	8.5
	265/55R20	113	V	XL	BSW	TL	✓	800	277	8.5
	275/45R20	110	V	XL	BSW	TL	✓	756	273	9.0
	275/55R20	117	V	XL	BSW	TL	✓	810	284	8.5
	275/60R20	116	V	XL	BSW	TL	✓	838	279	8.0
285/50R20	116	V	XL	BSW	TL	✓	794	297	9.0	

ADVANFORS A/T

The ADVANFORS A/T is an all-season tyre for SUV and CUV owners, and is an all terrain tyre specifically designed for road and off-road use.

Features & benefits

- The unique symmetrical tread pattern design provides smooth driving performance on highways and urban roads, improving ride comfort.
- The anti abrasion layer design on the sidewall provides additional protection against many common dangers in harsh off-road condition.
- The irregular distribution of sipes and various pitch alignment significantly reduces tire noise.
- The special silicon dioxide tread composite material not only greatly improves the performance of braking, turning, and handling.

UTQG: 460 A A M+S



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	245/70R16	111	T	XL	BSW	TL	✓	750	248	7.0
	245/75R16	111	T		BSW	TL	✓	774	248	7.0
	265/70R16	112	T		BSW	TL	✓	778	272	8.0
	275/70R16	114	T		BSW	TL	✓	792	279	8.0
17	245/65R17	111	H	XL	BSW	TL	✓	750	248	7.0
	265/65R17	112	H		BSW	TL	✓	776	272	8.0
	265/70R17	115	T		BSW	TL	✓	804	272	8.0
	275/65R17	115	H		BSW	TL	✓	790	279	8.0
	285/65R17	116	H		BSW	TL	✓	802	292	8.5
18	265/60R18	110	H		BSW	TL	✓	775	272	8.0
	265/65R18	114	H		BSW	TL	✓	801	272	8.0
	265/70R18	116	T		BSW	TL	✓	829	272	8.0
	275/65R18	116	H		BSW	TL	✓	815	279	8.0
	285/60R18	116	V		BSW	TL	✓	799	292	8.5

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR/LR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
15	255/70R15C	112/110	S	8PR/LRD	BSW	TL	✓	739	260	7.5
16	205/75R16C	110/108	R	10PR/LRE	BSW	TL	✓	714	203	5.5
	205R16C	110/108	S	10PR/LRE	BSW	TL	✓	736	208	6.0
17	225/70R17C	112/110	S	8PR/LRD	BSW	TL	✓	748	228	6.5



ADVANFORS A/T II

Robust all-terrain adaptability and anti-tear tread design, balancing off-road escape capability and highway comfort, is a versatile and durable choice for-core SUVs and pickups.

Features & benefits

- Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.
- The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.
- The block tread design with multiple sipes provide outstanding off-road traction and reduce tread damage on off-road condition.

UTQG: 500 A A M+S



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE/R30	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	205/80R16	104	S	XL	BSW	TL	✓	734	203	5.5
	215/70R16	100	S		BSW	TL	✓	708	221	6.5
	225/70R16	103	S		BSW	TL	✓	722	228	6.5
	235/70R16	106	S		BSW	TL	✓	736	240	7.0
	245/70R16	111	S	XL	BSW	TL	✓	750	248	7.0
	245/75R16	111	S		BSW	TL	✓	774	248	7.0
	265/70R16	112	T		BSW	TL	✓	778	272	8.0
	265/75R16	116	T		BSW	TL	✓	804	267	7.5
17	225/65R17	102	T		BSW	TL	✓	724	228	6.5
	235/65R17	104	S		BSW	TL	✓	738	240	7.0
	245/65R17	107	S		BSW	TL	✓	750	248	7.0
	255/70R17	112	T		BSW	TL	✓	790	260	7.5
	265/65R17	112	T		BSW	TL	✓	776	272	8.0
	265/70R17	115	T		BSW	TL	✓	804	272	8.0

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE/R30	Overall Diam (mm)	Section Width (mm)	Standard Rim
18	255/60R18	112	T	XL	BSW	TL	✓	763	260	7.5
	265/60R18	110	T		BSW	TL	✓	775	272	8.0
	265/65R18	116	T	XL	BSW	TL	✓	801	272	8.0
	285/60R18	120	T	XL	BSW	TL	✓	799	292	8.5
20	265/50R20	111	T	XL	BSW	TL	✓	774	277	8.5
	275/55R20	117	T	XL	BSW	TL	✓	810	284	8.5

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR/LR	Sidewall Style	TL/TT	ECE/R54	Overall Diam (mm)	Section Width (mm)	Standard Rim
15	LT215/75R15	100/97	Q	6PR/LRC	BSW	TL	✓	703	216	6.0
	LT235/75R15	110/107	Q	8PR/LRD	BSW	TL	✓	733	235	6.5
	31X10.50R15LT	109	Q	6PR/LRC	BSW	TL	✓	775	268	8.5
	33X12.50R15LT	108	Q	6PR/LRC	BSW	TL	✓	826	318	10.0
16	LT225/75R16	115/112	Q	10PR/LRE	BSW	TL	✓	722	228	6.5
	LT245/70R16	118/115	Q	8PR/LRD	BSW	TL	✓	750	248	7.0
	LT245/75R16	120/116	Q	10PR/LRE	BSW	TL	✓	774	248	7.0
	LT265/70R16	121/118	R	10PR/LRE	BSW	TL	✓	778	272	8.0
	LT265/75R16	123/120	Q	10PR/LRE	BSW	TL	✓	804	267	7.5
	LT285/75R16	126/123	Q	10PR/LRE	BSW	TL	✓	834	286	8.0
17	LT245/65R17	117/114	Q	8PR/LRD	BSW	TL	✓	750	248	7.0
	LT245/70R17	119/116	Q	10PR/LRE	BSW	TL	✓	776	248	7.0
	LT265/65R17	120/117	Q	10PR/LRE	BSW	TL	✓	776	272	8.0
	LT265/70R17	123/120	Q	10PR/LRE	BSW	TL	✓	804	272	8.0
	LT285/70R17	126/123	Q	8PR/LRD	BSW	TL	✓	832	292	8.5
	LT315/70R17	126/123	Q	10PR/LRE	BSW	TL	✓	874	323	9.5
18	LT265/60R18	119/116	Q	10PR/LRE	BSW	TL	✓	775	272	8.0
	LT265/70R18	124/121	Q	10PR/LRE	BSW	TL	✓	829	272	8.0
	LT275/70R18	125/122	Q	10PR/LRE	BSW	TL	✓	843	279	8.0
	LT285/65R18	125/122	Q	10PR/LRE	BSW	TL	✓	827	292	8.5
20	LT275/55R20	120/117	Q	10PR/LRE	BSW	TL	✓	810	284	8.5
	LT285/55R20	122/119	Q	10PR/LRE	BSW	TL	✓	822	297	9.0
	33X12.50R20LT	114	Q	10PR/LRE	BSW	TL	✓	826	318	10.0
	33X12.50R20LT	119	Q	12PR/LRE	BSW	TL	✓	826	318	10.0
	35X12.50R20LT	121	Q	10PR/LRE	BSW	TL	✓	877	318	10.0
	35X12.50R20LT	125	Q	12PR/LRE	BSW	TL	✓	877	318	10.0

COMMERCIAL VAN



ADVANFORS MAX

ADVANFORS MAX features an optimized tread design, reinforced shoulder blocks, and continuous circumferential ribs, providing stable grip, mileage, and load-carrying, and uses a dedicated truck tread compound to achieve high mileage and fuel efficiency.

Features & benefits

- Strong shoulder blocks and continuous circumferential large ribs for stable gripping, mileage and heavy duty.
- Combination construction of 2-ply polyesters and wide steel belts provide outstanding durability, with high safety factors.
- Zig-zag grooves offers enhanced traction in wet conditions.
- Specialized van tread compound for high-mileage and fuel efficiency.

M+S



Rim (inch)	Tire Size	Load Index	Speed Symbol	PR/LR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
12	145R12C	86/84	Q	8PR/LRD	BSW	TL	R54	237	145	4.0
	155R12C	88/86	Q	8PR/LRD	BSW	TL	R54	550	157	4.5
13	155R13C	90/88	Q	8PR/LRD	BSW	TL	R54	578	157	4.5
	165R13C	91/89	R	8PR/LRD	BSW	TL	R54	596	167	4.5
14	165/70R14C	89/87	R	6PR/LRC	BSW	TL	R54	588	170	5.0
	175/65R14C	90/88	T	6PR/LRC	BSW	TL	R54	584	177	5.0
	175/70R14C	95/93	R	6PR/LRC	BSW	TL	R54	602	177	5.0
	185R14C	102/100	R	8PR/LRD	BSW	TL	✓	650	188	5.5
	195R14C	106/104	R	8PR/LRD	BSW	TL	✓	666	198	5.5
15	195/70R15C	104/102	R	8PR/LRD	BSW	TL	✓	655	201	6.0
	195R15C	106/104	R	8PR/LRD	BSW	TL	✓	690	198	5.5
	205/65R15C	102/100	T	6PR/LRC	BSW	TL	✓	647	209	6.0

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR/LR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
15	205/70R15C	106 /104	R	8PR/LRD	BSW	TL	✓	669	209	6.0
	215/65R15C	104/102	T	6PR/LRC	BSW	TL	✓	661	221	6.5
	215/70R15C	109/107	R	8PR/LRD	BSW	TL	✓	683	221	6.5
	225/70R15C	112/110	R	8PR/LRD	BSW	TL	✓	697	228	6.5
16	185/75R16C	104/102	R	8PR/LRD	BSW	TL	✓	684	184	5.0
	195/65R16C	104/102	T	8PR/LRD	BSW	TL	✓	660	201	6.0
	195/75R16C	107/105	R	8PR/LRD	BSW	TL	✓	698	196	5.5
	205/65R16C	107/105	T	8PR/LRD	BSW	TL	✓	672	209	6.0
	205/75R16C	110/108	R	8PR/LRD	BSW	TL	✓	714	203	5.5
	215/65R16C	109/107	T	8PR/LRD	BSW	TL	✓	686	221	6.5
	215/75R16C	113/111	R	8PR/LRD	BSW	TL	✓	728	216	6.0
	225/65R16C	112/110	T	8PR/LRD	BSW	TL	✓	698	228	6.5
	225/75R16C	121/120	R	12PR/LRF	BSW	TL	✓	744	223	6.0
	235/65R16C	121/119	R	12PR/LRF	BSW	TL	✓	712	240	7.0



WSW TYRE



ADVANFORS TOURING

UTQG: 420 A A

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	165/65R13	77	T		WSW	TL	✓	544	170	5.0
	165/70R13	79	T		WSW	TL	✓	562	170	5.0
	165/80R13	83	T		WSW	TL	✓	594	165	4.5
	175/70R13	82	T		WSW	TL	✓	576	177	5.0
	185/70R13	86	T		WSW	TL	✓	590	189	5.5
14	185/65R14	86	H		WSW	TL	✓	596	189	5.5
	185/70R14	88	T		WSW	TL	✓	616	189	5.5
	195/70R14	91	T		WSW	TL	✓	630	201	6.0
	205/70R14	95	T		WSW	TL	✓	644	209	6.0
15	185/65R15	88	H		WSW	TL	✓	621	189	5.5
	195/65R15	91	V		WSW	TL	✓	635	201	6.0
	205/65R15	94	V		WSW	TL	✓	647	209	6.0



ADVANFORS MAX

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR/LR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
14	185R14C	102/100	R	8PR/LRD	WSW	TL	✓	650	188	5.5
	195R14C	106/104	R	8PR/LRD	WSW	TL	✓	666	198	5.5
	205/75R14C	109/107	R	8PR/LRD	WSW	TL	✓	664	203	5.5
15	195/70R15C	104/102	R	8PR/LRD	WSW	TL	✓	655	201	6.0
	195R15C	106/104	R	8PR/LRD	WSW	TL	✓	690	198	5.5
	205/75R15C	109/107	R	8PR/LRD	WSW	TL	✓	689	203	5.5
	215/70R15C	109/107	R	8PR/LRD	WSW	TL	✓	683	221	6.5
	225/70R15C	112/110	R	8PR/LRD	WSW	TL	✓	697	228	6.5





MADE IN THAILAND

TERRAMASTER HP



- ▶ **RANGE**
13-21
- ▶ **SPEED RATE**
T/H/V/W/Y
- ▶ **ASPECT RATIO**
30-80
- ▶ **SECTION WIDTH**
155-315

TERRAMASTER A/S



- ▶ **RANGE**
13-19
- ▶ **SPEED RATE**
H/T/V/W/Y
- ▶ **ASPECT RATIO**
35-80
- ▶ **SECTION WIDTH**
155-255

TRANSMASTER VAN



- ▶ **RANGE**
14-16
- ▶ **SPEED RATE**
T/S/R/W/H
- ▶ **ASPECT RATIO**
65-75
- ▶ **SECTION WIDTH**
175-235

TRANSMASTER VAN A/S



- ▶ **RANGE**
14-16
- ▶ **SPEED RATE**
H/R/S/T
- ▶ **ASPECT RATIO**
60-75
- ▶ **SECTION WIDTH**
175-235



WINDFORCE

ENJOY YOUR TRIPS WITH WINDFORCE TYRES