



CATALOGUE UPGRADE

HP/UHP/SUV/WINTER

passenger car tyre product manual

Fearless Progress, Steering into a New Era

No adventure without risk, no driving without safeguarding. On the way to the future, WINDFORCE is always upgrading and around you.

WINDFORCE brand, since 2012, unremitting team efforts and innovation, has developed 1200 tyre sizes covering PCR, UHP, SUV, 4 × 4, VAN, WINTER, ALL SEASON, etc.

WINDFORCE provides safety and value for the global customers, is constantly striving to create the best solutions for each application. WINDFORCE provides a wide variety of PCR/TBR to customers, based on the demand from local market. WINDFORCE persists on green tyres to protect the environment in a concept of low carbon development and lowers the rolling resistance of tyres.

WINDFORCE supplied by global TOP 10 manufacturer, has perfect quality supervision system, after-sales system and quality certification system to guarantee the product quality and improve the customer satisfaction.

Sustainable Ecosystem

We are steadfast in our commitment to sustainable development, seamlessly integrating environmental, social, and governance (ESG) considerations into our strategic and operational frameworks.



Circular Technology

Recycling waste tyre resources involves a comprehensive approach including repairing, renovating, and reusing old tyres to promote a circular economy.

Rubber raw materials


Every drop of our rubber is taken from the optimal temperature at 4-7 a.m. Strictly conforming to the latest regulations in EU.

Rubber Factory


Build an industrial ET brain smart factory

- Land utilization rate increases by 15%-25%.
- Reduce labor costs by 20%-30%.
- Increase molding efficiency by 20%-30%.
- Overall system production efficiency is improved by 15%-20%.


SUMMER

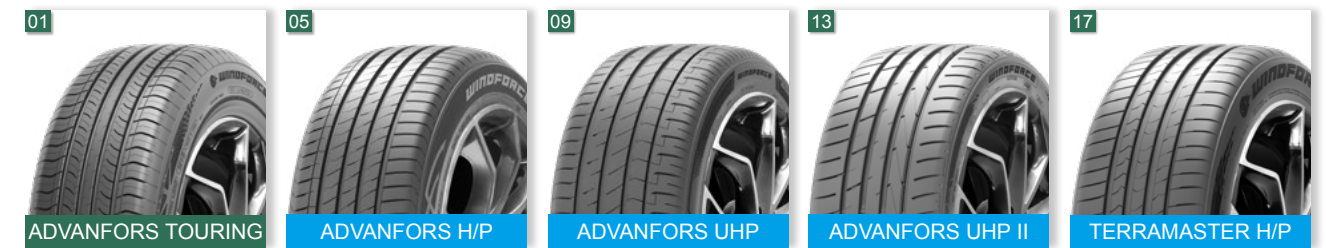


SUMMER

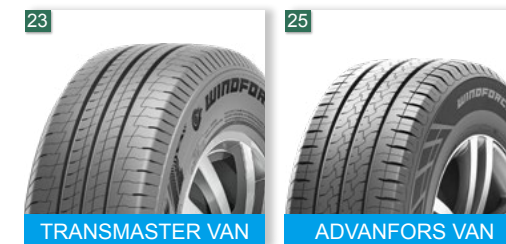


SUV / 4x4

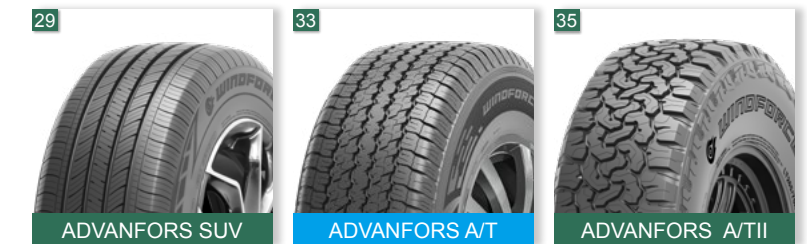


ALL SEASON

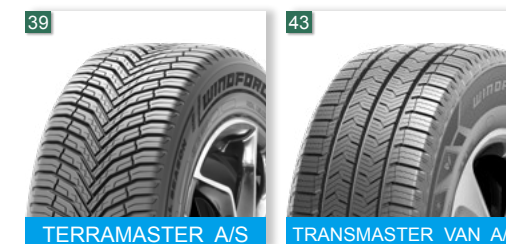

COMMERICAL

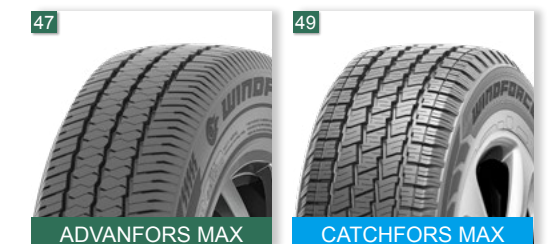

WINTER

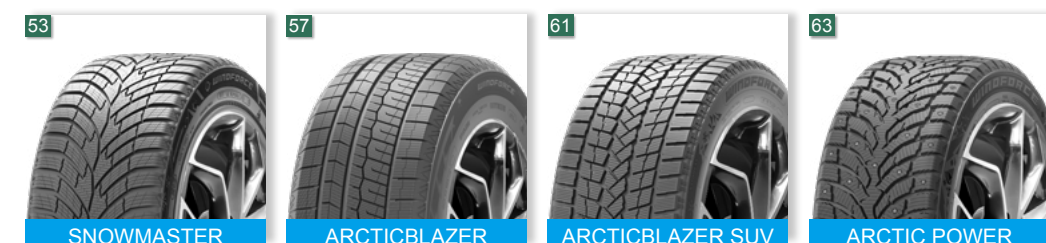



PREMIUM SUMMER TYRE FAMILY

A premium summer tyre family exclusively designed for passenger cars and high-performance vehicles, integrating cutting-edge technology with dynamic design philosophy to deliver exceptional handling, safety, and driving pleasure in various conditions



ADVANFORS TOURING ADVANFORS H/P ADVANFORS UHP ADVANFORS UHP II TERRAMASTER H/P TRANSMASTER VAN ADVANFORS VAN

ADVANFORS TOURING

UTQG: 420 A A

Classical symmetric tread & advanced compound tech balance handling, treadwear, and ride comfort, suitable for all-around touring tyre drivers.




Features & benefits

The tyre's casing is constructed with two steel belts reinforced by spirally wrapped nylon for enhanced strength and durability. This construction helps maintain the tire's shape and provides a smooth, comfortable ride while also improving high-speed stability and handling precision.

Symmetric tread design with multiple grooves and sipes for wet weather confidence.

TRI-PLEX TREAD COMPOUND, silica-enhanced all-season formulation, for lower rolling resistance for good fuel efficiency.

M+S



ADVANFORS TOURING

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	155/65R13	73	T		BSW	TL	√	532	157	4.5
	155/70R13	75	T		BSW	TL	√	548	157	4.5
	155/80R13	79	T		BSW	TL	√	578	157	4.5
	165/65R13	77	T		BSW	TL	√	544	170	5.0
	165/70R13	79	T		BSW	TL	√	562	170	5.0
	165/80R13	83	T		BSW	TL	√	594	165	4.5
	175/60R13	77	T		BSW	TL	√	540	177	5.0
	175/70R13	82	T		BSW	TL	√	576	177	5.0
	175/75R13	85	T		BSW	TL	√	592	177	5.0
14	185/70R13	86	T		BSW	TL	√	590	189	5.5
	165/55R14	72	T		BSW	TL	√	538	170	5.0
	165/60R14	75	H		BSW	TL	√	554	170	5.0
	165/65R14	79	H		BSW	TL	√	570	170	5.0
	165/70R14	81	T		BSW	TL	√	588	170	5.0
	175/65R14	82	H		BSW	TL	√	584	177	5.0
	175/70R14	84	T		BSW	TL	√	602	177	5.0
	175/75R14	87	T		BSW	TL	√	618	177	5.0
	185/60R14	82	H		BSW	TL	√	578	189	5.5
	185/65R14	86	H		BSW	TL	√	596	189	5.5
	185/70R14	88	T		BSW	TL	√	616	189	5.5
	195/60R14	86	H		BSW	TL	√	590	201	6.0
	195/70R14	91	T		BSW	TL	√	630	201	6.0
	205/60R14	88	H		BSW	TL	√	602	209	6.0
	205/70R14	95	T		BSW	TL	√	644	209	6.0
15	175/50R15	75	H		BSW	TL	√	557	182	5.5
	175/60R15	81	H		BSW	TL	√	591	177	5.0
	175/65R15	84	H		BSW	TL	√	609	177	5.0
	185/55R15	82	V		BSW	TL	√	585	194	6.0
	185/60R15	84	H		BSW	TL	√	603	189	5.5
	185/65R15	88	H		BSW	TL	√	621	189	5.5
	195/50R15	82	V		BSW	TL	√	577	201	6.0
	195/55R15	85	V		BSW	TL	√	595	201	6.0
	195/60R15	88	V		BSW	TL	√	615	201	6.0
	195/65R15	91	V		BSW	TL	√	635	201	6.0
	205/60R15	91	H		BSW	TL	√	627	209	6.0
	205/65R15	94	V		BSW	TL	√	647	209	6.0
	205/70R15	96	H		BSW	TL	√	669	209	6.0
	215/70R15	98	H		BSW	TL	√	683	221	6.5
16	185/55R16	83	V		BSW	TL	√	610	194	6.0
	195/50R16	84	V		BSW	TL	√	602	201	6.0
	195/55R16	87	V		BSW	TL	√	620	201	6.0
	195/60R16	89	H		BSW	TL	√	640	201	6.0
	205/45ZR16	87	W	XL	BSW	TL	√	590	206	7.0
	205/50R16	91	V	XL	BSW	TL	√	612	214	6.5
	205/55R16	91	V		BSW	TL	√	632	214	6.5
	205/55ZR16	94	W	XL	BSW	TL	√	632	214	6.5
	205/60R16	92	V		BSW	TL	√	652	209	6.0
	205/65R16	95	H		BSW	TL	√	672	209	6.0
	215/45ZR16	90	W	XL	BSW	TL	√	600	213	7.0



ADVANFORS TOURING



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	215/55R16	97	V	XL	BSW	TL	√	642	226	7.0
	215/60R16	99	V	XL	BSW	TL	√	664	221	6.5
	215/65R16	98	V		BSW	TL	√	686	221	6.5
	225/55R16	99	V	XL	BSW	TL	√	654	233	7.0
	225/60R16	98	H		BSW	TL	√	676	228	6.5
	235/60R16	100	H		BSW	TL	√	688	240	7.0
17	195/40ZR17	81	W	XL	BSW	TL	√	588	200	7.0
	195/45ZR17	85	W	XL	BSW	TL	√	608	195	6.5
	205/40ZR17	84	W	XL	BSW	TL	√	596	212	7.5
	205/45ZR17	88	W	XL	BSW	TL	√	616	206	7.0
	205/50ZR17	93	W	XL	BSW	TL	√	638	214	6.5
	205/55ZR17	95	W	XL	BSW	TL	√	658	214	6.5
	215/45ZR17	91	W	XL	BSW	TL	√	626	213	7.0
	215/50ZR17	95	W	XL	BSW	TL	√	648	226	7.0
	215/55ZR17	98	W	XL	BSW	TL	√	668	226	7.0
	225/45ZR17	94	W	XL	BSW	TL	√	634	225	7.5
	225/50ZR17	98	W	XL	BSW	TL	√	658	233	7.0
	225/55ZR17	101	W	XL	BSW	TL	√	680	233	7.0
	235/45ZR17	97	W	XL	BSW	TL	√	644	236	8.0
	235/55ZR17	103	W	XL	BSW	TL	√	690	245	7.5
18	215/40ZR18	89	W	XL	BSW	TL	√	629	218	7.5
	215/45ZR18	93	W	XL	BSW	TL	√	651	213	7.0
	225/40ZR18	92	W	XL	BSW	TL	√	637	230	8.0
	225/45ZR18	95	W	XL	BSW	TL	√	659	225	7.5
	235/40ZR18	95	W	XL	BSW	TL	√	645	241	8.5
	235/45ZR18	98	W	XL	BSW	TL	√	669	236	8.0
	245/40ZR18	97	W	XL	BSW	TL	√	653	248	8.5
	245/45ZR18	100	W	XL	BSW	TL	√	677	243	8.0
	255/40ZR18	99	W	XL	BSW	TL	√	661	260	9.0
	255/45ZR18	103	W	XL	BSW	TL	√	687	255	8.5



ADVANFORS H/P

UTQG: 400 A A

The summer tyre ADVANFORS H/P, is designed to provide you safety all the while and to offer the best longevity in its category.



Features & benefits

- Non-symmetric from outside to inside for high-class performance. With close stiffness of two shoulders design, more freedom is allowed.
- High performance compound and optimal block/void ratio ensures for great dry braking and handling.
- The calculation of circumferetial grooves for the series can efficiently avoid aquaplaning and delivering a strong brake performance.



RANGE	13-18
SPEED RATE	H/T/V/W/Y
ASPECT RATIO	35-80
SECTION WIDTH	145-255

SW	Series	Number of groove
≤175	all	3
185	≥70	3
	≤65	4
≥195	all	4

ADVANFORS H/P

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	145/70R13	71	T		BSW	TL	√	534	150	4.5
	145/80R13	75	T		BSW	TL	√	562	145	4.0
	155/65R13	73	T		BSW	TL	√	532	157	4.5
	155/70R13	75	T		BSW	TL	√	548	157	4.5
	155/80R13	79	T		BSW	TL	√	578	157	4.5
	165/65R13	77	T		BSW	TL	√	544	170	5.0
	165/70R13	79	T		BSW	TL	√	562	170	5.0
	175/65R13	80	T		BSW	TL	√	558	177	5.0
	175/70R13	82	T		BSW	TL	√	576	177	5.0
	175/75R13	85	T		BSW	TL	√	592	177	5.0
14	155/65R14	75	T		BSW	TL	√	558	157	4.5
	165/60R14	75	H		BSW	TL	√	554	170	5.0
	165/65R14	79	T		BSW	TL	√	570	170	5.0
	165/70R14	81	T		BSW	TL	√	588	170	5.0
	165/70R14	85	T	XL	BSW	TL	√	588	170	5.0
	175/65R14	82	H		BSW	TL	√	584	177	5.0
	175/65R14	86	T	XL	BSW	TL	√	584	177	5.0
	175/70R14	84	T		BSW	TL	√	602	177	5.0
	175/70R14	88	T	XL	BSW	TL	√	602	177	5.0
	175/75R14	87	T		BSW	TL	√	618	177	5.0
	185/55R14	80	V		BSW	TL	√	560	194	6.0
	185/60R14	82	H		578	TL	√	578	189	5.5
	185/65R14	86	H		596	TL	√	596	189	5.5
	185/70R14	88	T		616	TL	√	616	189	5.5
15	195/70R14	91	T		630	TL	√	630	201	6.0
	155/60R15	74	T		BSW	TL	√	567	157	4.5
	165/60R15	81	T	XL	BSW	TL	√	579	170	5.0
	165/65R15	81	T		BSW	TL	√	595	170	5.0
	175/55R15	77	H		BSW	TL	√	573	182	5.5
	175/60R15	81	H		BSW	TL	√	591	177	5.0
	175/65R15	84	H		BSW	TL	√	609	177	5.0
	185/55R15	82	V		BSW	TL	√	585	194	6.0
	185/60R15	84	H		BSW	TL	√	603	189	5.5
	185/60R15	88	H	XL	BSW	TL	√	603	189	5.5
	185/65R15	88	H		BSW	TL	√	621	189	5.5
	185/65R15	92	T	XL	BSW	TL	√	621	189	5.5
	195/50R15	82	V		BSW	TL	√	577	201	6.0
	195/55R15	85	V		BSW	TL	√	595	201	6.0
	195/60R15	88	H		BSW	TL	√	615	201	6.0
	195/60R15	88	V		BSW	TL	√	615	201	6.0
	195/65R15	91	V		BSW	TL	√	635	201	6.0
	195/65R15	95	H	XL	BSW	TL	√	635	201	6.0
	205/60R15	91	V		BSW	TL	√	627	209	6.0
	205/65R15	94	V		BSW	TL	√	672	209	6.0
	215/65R15	96	H		BSW	TL	√	661	221	6.5

ADVANFORS H/P



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	185/55R16	87	V	XL	BSW	TL	√	610	194	6.0
	195/50R16	84	V		BSW	TL	√	602	201	6.0
	195/55R16	87	V		BSW	TL	√	620	201	6.0
	195/55R16	91	V	XL	BSW	TL	√	620	201	6.0
	195/60R16	89	H		BSW	TL	√	640	201	6.0
	205/55R16	91	V		BSW	TL	√	632	214	6.5
	205/55R16	91	W		BSW	TL	√	632	214	6.5
	205/60R16	92	V		BSW	TL	√	652	209	6.0
	205/60R16	96	V	XL	BSW	TL	√	652	209	6.0
	215/55R16	97	W	XL	BSW	TL	√	642	226	7.0
	215/60R16	95	V		BSW	TL	√	664	221	6.5
	215/60R16	99	V	XL	BSW	TL	√	664	221	6.5
	215/65R16	98	H		BSW	TL	√	686	221	6.5
	215/70R16	100	H		BSW	TL	√	708	221	6.5
	225/55R16	99	W	XL	BSW	TL	√	654	233	7.0
	225/60R16	98	H		BSW	TL	√	676	228	6.5
	225/60R16	102	V	XL	BSW	TL	√	676	228	6.5
	225/70R16	107	H	XL	BSW	TL	√	722	228	6.5
	235/60R16	100	H		BSW	TL	√	688	240	7.0
	*205/40R17	84	W	XL	BSW	TL	√	596	212	7.5
17	*205/45R17	88	W	XL	BSW	TL	√	616	206	7.0
	*205/50R17	93	W	XL	BSW	TL	√	638	214	6.5
	*205/55R17	95	W	XL	BSW	TL	√	658	214	6.5
	*215/40R17	87	W	XL	BSW	TL	√	604	218	7.5
	*215/45R17	91	W	XL	BSW	TL	√	626	213	7.0
	*215/50R17	95	W	XL	BSW	TL	√	648	226	7.0
	*215/55R17	98	W	XL	BSW	TL	√	668	226	7.0
	*215/60R17	100	V	XL	BSW	TL	√	690	221	6.5
	*215/65R17	99	V		BSW	TL	√	712	221	6.5
	*225/45ZR17	94	Y	XL	BSW	TL	√	634	225	7.5
	*225/50ZR17	98	Y	XL	BSW	TL	√	658	233	7.0
	*225/55R17	101	W	XL	BSW	TL	√	680	233	7.0
	*225/60R17	103	V	XL	BSW	TL	√	702	228	6.5
	*225/65R17	106	V	XL	BSW	TL	√	724	228	6.5
	*235/45R17	97	W	XL	BSW	TL	√	644	236	8.0
	*235/55R17	103	W	XL	BSW	TL	√	690	245	7.5
	*235/60R17	106	W	XL	BSW	TL	√	714	240	7.0
	*235/65R17	108	V	XL	BSW	TL	√	738	240	7.0
	*245/45R17	99	W	XL	BSW	TL	√	652	243	8.0

ADVANFORS H/P

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
18	*215/40ZR18	89	Y	XL	BSW	TL	√	629	218	7.5
	*215/45ZR18	93	Y	XL	BSW	TL	√	651	213	7.0
	*215/50R18	92	W		BSW	TL	√	673	226	7.0
	*215/55R18	99	V	XL	BSW	TL	√	693	226	7.0
	*225/40ZR18	92	Y	XL	BSW	TL	√	637	230	8.0
	*225/45ZR18	95	Y	XL	BSW	TL	√	659	225	7.5
	*225/50R18	99	W	XL	BSW	TL	√	683	233	7.0
	*225/55R18	102	V	XL	BSW	TL	√	705	233	7.0
	*225/60R18	104	V	XL	BSW	TL	√	727	228	6.5
	*235/40ZR18	95	Y	XL	BSW	TL	√	645	241	8.5
	*235/45ZR18	98	Y	XL	BSW	TL	√	669	236	8.0
	*235/50ZR18	101	Y	XL	BSW	TL	√	693	245	7.5
	*235/55R18	104	W	XL	BSW	TL	√	715	245	7.5
	*235/60R18	107	V	XL	BSW	TL	√	739	240	7.0
	*245/40ZR18	97	Y	XL	BSW	TL	√	653	248	8.5
	*245/45ZR18	100	Y	XL	BSW	TL	√	677	243	8.0
	*255/35ZR18	94	Y	XL	BSW	TL	√	635	260	9.0
	*255/45ZR18	103	Y	XL	BSW	TL	√	687	255	8.5
	*255/55R18	109	W	XL	BSW	TL	√	737	265	8.0

*UNDER DEVELOPMENT

ADVANFORS UHP

UTQG: 420 AA A

The ADVANFORS UHP aims to maximize road performance and driving pleasure of their newest sport car, super SUVs and electrified vehicles.



Features & benefits

- Stylish and strong shoulder design to form enough ground contact in the outer area for crisp cornering.
- Wide longitudinal grooves and shoulder lateral openings provide optimum drainage when driving straight ahead.
- The whole 3-D edges design for smooth tread block entry into the footprint to improve acoustic comfort.

M+S



RANGE	15-20
SPEED RATE	V/W/Y
ASPECT RATIO	30-65
SECTION WIDTH	195-315

ADVANFORS UHP

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
15	195/45R15	78	V		BSW	TL	√	557	195	6.5
	195/45R16	84	V	XL	BSW	TL	√	582	195	6.5
	205/45R16	87	W	XL	BSW	TL	√	590	206	7.0
16	205/50R16	87	W		BSW	TL	√	594	165	4.5
	205/50R16	91	W	XL	BSW	TL	√	594	165	4.5
	205/55R16	94	W	XL	BSW	TL	√	632	241	6.5
	215/45R16	90	W	XL	BSW	TL	√	600	213	7.0
	195/40R17	81	W	XL	BSW	TL	√	554	170	5.0
17	205/40R17	84	W	XL	BSW	TL	√	596	212	7.5
	205/45R17	88	W	XL	BSW	TL	√	616	206	7.0
	205/50R17	93	W	XL	BSW	TL	√	638	214	6.5
	205/55R17	95	W	XL	BSW	TL	√	658	214	6.5
	215/40R17	87	W	XL	BSW	TL	√	604	218	7.5
	215/45R17	91	W	XL	BSW	TL	√	626	213	7.0
	215/50R17	95	W	XL	BSW	TL	√	648	226	7.0
	215/55R17	98	W	XL	BSW	TL	√	668	226	7.0
	215/60R17	100	V	XL	BSW	TL	√	690	221	6.5
	225/45ZR17	94	Y	XL	BSW	TL	√	634	225	7.5
	225/50ZR17	98	Y	XL	BSW	TL	√	658	233	7.0
	225/55R17	101	W	XL	BSW	TL	√	680	233	7.0
	225/60R17	103	V	XL	BSW	TL	√	702	228	6.5
	225/65R17	106	V	XL	BSW	TL	√	724	228	6.5
	235/45R17	97	W	XL	BSW	TL	√	644	236	8.0
	235/55R17	103	W	XL	BSW	TL	√	690	245	7.5
	235/60R17	106	V	XL	BSW	TL	√	714	240	7.0
18	235/65R17	108	V	XL	BSW	TL	√	738	240	7.0
	245/45R17	99	W	XL	BSW	TL	√	652	243	8.0
	205/40ZR18	86	Y	XL	BSW	TL	√	621	212	7.5
	215/40ZR18	89	Y	XL	BSW	TL	√	629	218	7.5
	215/45ZR18	93	Y	XL	BSW	TL	√	651	213	7.0
	215/50R18	92	W		BSW	TL	√	673	226	7.0
	215/55R18	99	W	XL	BSW	TL	√	693	226	7.0
	225/40ZR18	92	Y	XL	BSW	TL	√	637	230	8.0
	225/45ZR18	95	Y	XL	BSW	TL	√	659	225	7.5
	225/50R18	99	W	XL	BSW	TL	√	683	233	7.0
	225/55R18	102	W	XL	BSW	TL	√	705	233	7.0
	225/60R18	104	V	XL	BSW	TL	√	727	228	6.5
	235/40ZR18	95	Y	XL	BSW	TL	√	645	241	8.5

ADVANFORS UHP



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
18	235/45ZR18	98	Y	XL	BSW	TL	√	669	236	8.0
	235/50ZR18	101	Y	XL	BSW	TL	√	693	245	7.5
	235/55R18	104	W	XL	BSW	TL	√	715	245	7.5
	235/60R18	107	V	XL	BSW	TL	√	739	240	7.0
	245/40ZR18	97	Y	XL	BSW	TL	√	653	248	8.5
	245/45ZR18	100	Y	XL	BSW	TL	√	677	243	8.0
	245/50R18	104	W	XL	BSW	TL	√	703	253	7.5
	255/35ZR18	94	Y	XL	BSW	TL	√	635	260	9.0
	255/40ZR18	99	Y	XL	BSW	TL	√	661	260	9.0
	255/45ZR18	103	Y	XL	BSW	TL	√	687	255	8.5
19	265/35ZR18	97	Y	XL	BSW	TL	√	643	271	9.5
	225/35ZR19	88	Y	XL	BSW	TL	√	641	230	8.0
	225/40ZR19	93	Y	XL	BSW	TL	√	663	230	8.0
	225/45ZR19	96	Y	XL	BSW	TL	√	685	225	7.5
	225/55R19	103	W	XL	BSW	TL	√	731	233	7.0
	235/35ZR19	91	Y	XL	BSW	TL	√	647	241	8.5
	235/40ZR19	96	Y	XL	BSW	TL	√	671	241	8.5
	235/45ZR19	99	Y	XL	BSW	TL	√	695	236	8.0
	235/50ZR19	103	Y	XL	BSW	TL	√	719	245	7.5
	235/55ZR19	105	Y	XL	BSW	TL	√	741	245	7.5
	245/35ZR19	93	Y	XL	BSW	TL	√	655	248	8.5
	245/40ZR19	98	Y	XL	BSW	TL	√	679	248	8.5
	245/45ZR19	102	Y	XL	BSW	TL	√	703	243	8.0
	255/30ZR19	91	Y	XL	BSW	TL	√	637	260	9.0
	255/35ZR19	96	Y	XL	BSW	TL	√	661	260	9.0
	255/40ZR19	100	Y	XL	BSW	TL	√	687	260	9.0
	255/50ZR19	107	Y	XL	BSW	TL	√	739	265	8.0
	255/55R19	111	W	XL	BSW	TL	√	763	265	8.0
20	275/30ZR19	96	Y	XL	BSW	TL	√	649	278	9.5
	275/35ZR19	100	Y	XL	BSW	TL	√	675	278	9.5
	245/30ZR20	90	Y	XL	BSW	TL	√	656	248	8.5
	245/35ZR20	95	Y	XL	BSW	TL	√	680	248	8.5
	245/40ZR20	99	Y	XL	BSW	TL	√	704	248	8.5
	245/45ZR20	103	Y	XL	BSW	TL	√	728	243	8.0
	255/30ZR20	92	Y	XL	BSW	TL	√	662	260	9.0
	255/35ZR20	97	Y	XL	BSW	TL	√	686	260	9.0
	255/40ZR20	101	Y	XL	BSW	TL	√	712	260	9.0
	255/45ZR20	105	Y	XL	BSW	TL	√	738	255	8.5
	265/45ZR20	108	Y	XL	BSW	TL	√	746	266	9.0

ADVANFORS UHP

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
20	265/50R20	111	W	XL	BSW	TL	√	774	277	8.5
	275/30ZR20	97	Y	XL	BSW	TL	√	674	278	9.5
	275/35ZR20	102	Y	XL	BSW	TL	√	700	278	9.5
	275/40ZR20	106	Y	XL	BSW	TL	√	728	278	9.5
	275/45ZR20	110	Y	XL	BSW	TL	√	756	273	9.0
	315/35ZR20	110	Y	XL	BSW	TL	√	728	320	11.0

ADVANFORS UHP II

UTQG: 420 AA A

Highly stylishly designed and engineered specially for various luxury sedans and EVs.



Features & benefits

- Sporty and stylish HP/UHP non-symmetric tread pattern design. Logical control of transition from inside to outside for excellent wet/dry performance.
- Continuous ribs and reinforced two-shoulder design for high-speed stability and uniform treadwear.
- Different-size pitches design and alignment effectively lower rolling noise and improve driving comfort.

M+S



RANGE	16-22
SPEED RATE	V/W
ASPECT RATIO	30-65
SECTION WIDTH	195-315

ADVANFORS UHP II

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	*195/45R16	84	V	XL	BSW	TL	√	582	195	6.5
	195/55R16	91	V	XL	BSW	TL	√	620	201	6.0
	*205/45ZR16	87	W	XL	BSW	TL	√	590	206	7.0
	205/55ZR16	94	W	XL	BSW	TL	√	632	214	6.5
	205/60R16	96	V	XL	BSW	TL	√	652	209	6.0
	*215/45R16	90	V	XL	BSW	TL	√	600	213	7.0
	215/55ZR16	97	W	XL	BSW	TL	√	642	226	7.0
	225/55ZR16	99	W	XL	BSW	TL	√	654	233	7.0
17	*205/40ZR17	84	W	XL	BSW	TL	√	596	212	7.5
	205/45ZR17	88	W	XL	BSW	TL	√	616	206	7.0
	205/50ZR17	93	W	XL	BSW	TL	√	638	241	6.5
	205/55ZR17	95	W	XL	BSW	TL	√	658	214	6.5
	*215/40ZR17	87	W	XL	BSW	TL	√	604	218	7.5
	215/45ZR17	91	W	XL	BSW	TL	√	626	213	7.0
	215/50ZR17	95	W	XL	BSW	TL	√	648	226	7.0
	215/55ZR17	98	W	XL	BSW	TL	√	668	226	7.0
	215/60R17	100	V	XL	BSW	TL	√	690	221	6.5
	*215/65R17	103	V	XL	BSW	TL	√	712	221	6.5
	225/45ZR17	94	W	XL	BSW	TL	√	634	225	7.5
	225/50ZR17	98	W	XL	BSW	TL	√	658	233	7.0
	225/55ZR17	101	W	XL	BSW	TL	√	680	233	7.0
	225/60R17	103	V	XL	BSW	TL	√	702	228	6.5
	225/65R17	102	V		BSW	TL	√	724	228	6.5
	235/45ZR17	97	W	XL	BSW	TL	√	644	236	8.0
18	235/50ZR17	100	W	XL	BSW	TL	√	668	245	7.5
	235/55ZR17	103	W	XL	BSW	TL	√	690	245	7.5
	*235/60R17	102	V		BSW	TL	√	714	240	7.0
	*235/65R17	108	V	XL	BSW	TL	√	738	240	7.0
	245/40ZR17	95	W	XL	BSW	TL	√	628	248	8.5
	245/45ZR17	99	W	XL	BSW	TL	√	652	243	8.0
	215/40ZR18	89	W	XL	BSW	TL	√	629	218	7.5
	215/45ZR18	93	W	XL	BSW	TL	√	651	213	7.0
	215/50ZR18	96	W	XL	BSW	TL	√	673	226	7.0
	215/55ZR18	99	W	XL	BSW	TL	√	693	226	7.0

ADVANFORS UHP II



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
18	225/60R18	104	V	XL	BSW	TL	√	727	228	6.5
	235/40ZR18	95	W	XL	BSW	TL	√	645	241	8.5
	235/45ZR18	98	W	XL	BSW	TL	√	669	236	8.0
	235/50ZR18	101	W	XL	BSW	TL	√	693	245	7.5
	235/55ZR18	104	W	XL	BSW	TL	√	715	245	7.5
	235/60R18	107	V	XL	BSW	TL	√	739	240	7.0
	245/35ZR18	92	W	XL	BSW	TL	√	629	248	8.5
	245/40ZR18	97	W	XL	BSW	TL	√	653	248	8.5
	245/45ZR18	100	W	XL	BSW	TL	√	677	243	8.0
	245/50ZR18	104	W	XL	BSW	TL	√	703	253	7.5
	255/35ZR18	94	W	XL	BSW	TL	√	635	260	9.0
	255/40ZR18	99	W	XL	BSW	TL	√	661	260	9.0
	255/45ZR18	103	W	XL	BSW	TL	√	687	255	8.5
	255/55ZR18	109	W	XL	BSW	TL	√	737	265	8.0
	*265/35ZR18	97	W	XL	BSW	TL	√	643	271	9.5
	275/40ZR18	103	W	XL	BSW	TL	√	677	278	9.5
19	225/40ZR19	93	W	XL	BSW	TL	√	663	230	8.0
	225/45ZR19	96	W	XL	BSW	TL	√	685	225	7.5
	225/55ZR19	103	W	XL	BSW	TL	√	731	233	7.0
	235/35ZR19	91	W	XL	BSW	TL	√	647	241	8.5
	235/40ZR19	96	W	XL	BSW	TL	√	671	241	8.5
	235/45ZR19	99	W	XL	BSW	TL	√	695	236	8.0
	235/50ZR19	103	W	XL	BSW	TL	√	719	245	7.5
	235/55ZR19	105	W	XL	BSW	TL	√	741	245	7.5
	245/35ZR19	93	W	XL	BSW	TL	√	655	248	8.5
	245/40ZR19	98	W	XL	BSW	TL	√	679	248	8.5
	245/45ZR19	102	W	XL	BSW	TL	√	703	243	8.0
	245/50ZR19	105	W	XL	BSW	TL	√	729	253	7.5
	245/55ZR19	107	W	XL	BSW	TL	√	753	253	7.5
	255/35ZR19	96	W	XL	BSW	TL	√	661	260	9.0
	255/40ZR19	100	W	XL	BSW	TL	√	687	260	9.0
	255/45ZR19	104	W	XL	BSW	TL	√	713	255	8.5
	255/50ZR19	107	W	XL	BSW	TL	√	739	265	8.0
	255/55ZR19	111	W	XL	BSW	TL	√	763	265	8.0
	255/60R19	113	V	XL	BSW	TL	√	789	260	7.5
	265/50ZR19	110	W	XL	BSW	TL	√	749	277	8.5
	275/35ZR19	100	W	XL	BSW	TL	√	675	278	9.5
	275/40ZR19	105	W	XL	BSW	TL	√	703	278	9.5

ADVANFORS UHP II



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
19	275/45ZR19	108	W	XL	BSW	TL	√	731	273	9.0
	285/45ZR19	111	W	XL	BSW	TL	√	739	285	9.5
	235/50ZR20	104	W	XL	BSW	TL	√	744	245	7.5
	*235/55ZR20	105	W	XL	BSW	TL	√	766	245	7.5
	245/35ZR20	95	W	XL	BSW	TL	√	680	248	8.5
	245/40ZR20	99	W	XL	BSW	TL	√	704	248	8.5
	245/45ZR20	103	W	XL	BSW	TL	√	728	243	8.0
	245/50ZR20	102	W	XL	BSW	TL	√	754	253	7.5
	*255/35ZR20	97	W	XL	BSW	TL	√	686	260	9.0
	255/40ZR20	101	W	XL	BSW	TL	√	712	260	9.0
	255/45ZR20	105	W	XL	BSW	TL	√	738	255	8.5
	255/50ZR20	109	W	XL	BSW	TL	√	764	265	8.0
	255/55ZR20	110	W	XL	BSW	TL	√	788	265	8.0
	265/40ZR20	104	W	XL	BSW	TL	√	720	271	9.5
	265/45ZR20	108	W	XL	BSW	TL	√	746	266	9.0
	265/50ZR20	111	W	XL	BSW	TL	√	774	277	8.5
	275/30ZR20	97	W	XL	BSW	TL	√	674	278	9.5
	275/35ZR20	102	W	XL	BSW	TL	√	700	278	9.5
20	275/40ZR20	106	W	XL	BSW	TL	√	728	278	9.5
	275/45ZR20	110	W	XL	BSW	TL	√	756	273	9.0
	275/50ZR20	113	W	XL	BSW	TL	√	784	284	8.5
	275/55ZR20	117	W	XL	BSW	TL	√	810	284	8.5
	285/45ZR20	112	W	XL	BSW	TL	√	764	285	9.5
	285/50ZR20	116	W	XL	BSW	TL	√	794	297	9.0
	305/40ZR20	112	W	XL	BSW	TL	√	752	313	11.0
	315/35ZR20	110	W	XL	BSW	TL	√	728	320	11.0
	255/45ZR21	106	W	XL	BSW	TL	√	763	255	8.5
	265/45ZR21	108	W	XL	BSW	TL	√	771	266	9.0
	275/40ZR21	107	W	XL	BSW	TL	√	753	278	9.5
	275/45ZR21	110	W	XL	BSW	TL	√	781	273	9.0
	285/35ZR21	105	W	XL	BSW	TL	√	733	290	10.0
	*285/40ZR21	109	W	XL	BSW	TL	√	761	290	10.0
	285/45ZR21	113	W	XL	BSW	TL	√	789	285	9.5
	*295/35ZR21	107	W	XL	BSW	TL	√	739	301	10.5
	*295/40ZR21	111	W	XL	BSW	TL	√	769	301	10.5
	315/35ZR21	111	W	XL	BSW	TL	√	753	320	11.0
22	275/40ZR22	107	W	XL	BSW	TL	√	779	278	9.5
	315/35ZR22	111	W	XL	BSW	TL	√	779	320	11.0

*UNDER DEVELOPMENT

TERRAMASTER H/P

UTQG: 380 A A

The TERRAMASTER H/P offers the broadest size range for passengers vehicles, ensures comfort through improved construction, enhances wet grip and reduces rolling resistance with an optimized compound, and delivers exceptional dry/wet handling performance.



Features & benefits

Covering a most wide range of sizes for eco, HP/UHP vehicles.

The "3+1" wider main grooves in variable width circumferential grooves offer exceptional water-evacuation performance for wet driving safety.

High performance compounding and optimized block/ratio ensures for great road grips and lower rolling resistance.



RANGE	13-21
SPEED RATE	T/H/V/W/Y
ASPECT RATIO	30-80
SECTION WIDTH	155-315

TERRAMASTER H/P

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	155/65R13	73	T		BSW	TL	√	532	157	4.5
	155/70R13	75	T		BSW	TL	√	548	157	4.5
	155/80R13	79	T		BSW	TL	√	578	157	4.5
	165/70R13	79	T		BSW	TL	√	562	170	5.0
	165/80R13	83	T		BSW	TL	√	594	165	4.5
	175/70R13	82	T		BSW	TL	√	576	177	5.0
	185/70R13	86	T		BSW	TL	√	590	189	5.5
14	155/65R14	75	T		BSW	TL	√	558	157	4.5
	165/60R14	75	H		BSW	TL	√	554	170	5.0
	165/65R14	79	T		BSW	TL	√	570	170	5.0
	165/70R14	81	T		BSW	TL	√	588	170	5.0
	175/60R14	79	H		BSW	TL	√	566	177	5.0
	175/65R14	82	H		BSW	TL	√	584	177	5.0
	175/70R14	84	T		BSW	TL	√	602	177	5.0
	175/70R14	88	T	XL	BSW	TL	√	602	177	5.0
	185/55R14	80	V		BSW	TL	√	560	194	6.0
	185/60R14	82	H		BSW	TL	√	578	189	5.5
	185/65R14	86	H		BSW	TL	√	596	189	5.5
	185/70R14	88	T		BSW	TL	√	616	189	5.5
	195/65R14	89	H		BSW	TL	√	660	201	6.0
	195/70R14	91	T		BSW	TL	√	630	201	6.0
15	155/60R15	74	H		BSW	TL	√	567	157	4.5
	165/60R15	81	T	XL	BSW	TL	√	579	170	5.0
	165/65R15	81	H		BSW	TL	√	595	170	5.0
	175/55R15	77	H		BSW	TL	√	573	182	5.5
	175/60R15	81	H		BSW	TL	√	591	177	5.0
	175/65R15	84	H		BSW	TL	√	609	177	5.0
	185/55R15	82	V		BSW	TL	√	585	194	6.0
	185/55R15	86	V	XL	BSW	TL	√	585	194	6.0
	185/60R15	84	H		BSW	TL	√	603	189	5.5
	185/60R15	88	H	XL	BSW	TL	√	603	189	5.5
	185/65R15	88	H		BSW	TL	√	621	189	5.5
	195/45R15	78	V		BSW	TL	√	557	195	6.5
	195/50R15	82	V		BSW	TL	√	577	201	6.0
	195/55R15	85	V		BSW	TL	√	595	201	6.0
	195/60R15	88	H		BSW	TL	√	615	201	6.0
	195/60R15	88	V		BSW	TL	√	615	201	6.0
	195/65R15	91	V		BSW	TL	√	635	201	6.0
	195/65R15	91	H		BSW	TL	√	635	201	6.0
	195/65R15	95	H	XL	BSW	TL	√	635	201	6.0
	205/60R15	91	H		BSW	TL	√	627	209	6.0
	205/65R15	94	V		BSW	TL	√	647	209	6.0
	205/70R15	96	H		BSW	TL	√	669	209	6.0
	215/65R15	96	H		BSW	TL	√	661	221	6.5
	215/70R15	98	H		BSW	TL	√	683	221	6.5

TERRAMASTER H/P



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	185/55R16	83	V		BSW	TL	✓	610	194	6.0
	195/45R16	84	V	XL	BSW	TL	✓	582	195	6.5
	195/50R16	84	V		BSW	TL	✓	602	201	6.0
	195/50R16	88	V	XL	BSW	TL	✓	602	201	6.0
	195/55R16	87	V		BSW	TL	✓	620	201	6.0
	195/55R16	91	V	XL	BSW	TL	✓	620	201	6.0
	195/60R16	89	V		BSW	TL	✓	640	201	6.0
	205/45R16	87	W	XL	BSW	TL	✓	590	206	7.0
	205/50R16	87	V		BSW	TL	✓	612	214	6.5
	205/50R16	91	V	XL	BSW	TL	✓	612	214	6.5
	205/55R16	91	V		BSW	TL	✓	632	214	6.5
	205/55R16	94	W	XL	BSW	TL	✓	632	214	6.5
	205/60R16	92	V		BSW	TL	✓	652	209	6.0
	205/60R16	96	V	XL	BSW	TL	✓	652	209	6.0
	205/65R16	95	H		BSW	TL	✓	672	209	6.0
	215/40R16	86	W	XL	BSW	TL	✓	578	218	7.5
	215/45R16	90	W	XL	BSW	TL	✓	600	213	7.0
	215/55R16	97	W	XL	BSW	TL	✓	642	226	7.0
	215/60R16	99	V	XL	BSW	TL	✓	664	221	6.5
	215/65R16	98	V		BSW	TL	✓	686	221	6.5
	215/70R16	100	H		BSW	TL	✓	708	221	6.5
	225/55R16	99	W	XL	BSW	TL	✓	654	233	7.0
	225/60R16	98	H		BSW	TL	✓	676	228	6.5
	235/60R16	100	H		BSW	TL	✓	688	240	7.0
17	195/45R17	85	W	XL	BSW	TL	✓	608	195	6.5
	205/40R17	84	W	XL	BSW	TL	✓	596	212	7.5
	205/45R17	88	W	XL	BSW	TL	✓	616	206	7.0
	205/50R17	93	W	XL	BSW	TL	✓	638	214	6.5
	205/55R17	95	W	XL	BSW	TL	✓	658	214	6.5
	215/40R17	87	W	XL	BSW	TL	✓	604	218	7.5
	215/45R17	91	W	XL	BSW	TL	✓	626	213	7.0
	215/50R17	95	W	XL	BSW	TL	✓	648	226	7.0
	215/55R17	98	W	XL	BSW	TL	✓	668	226	7.0
	215/60R17	96	V		BSW	TL	✓	690	221	6.5
	225/45R17	94	W	XL	BSW	TL	✓	634	225	7.5
	225/50R17	98	W	XL	BSW	TL	✓	658	233	7.0
	225/55R17	101	W	XL	BSW	TL	✓	680	233	7.0
	225/60R17	103	V	XL	BSW	TL	✓	702	228	6.5
	225/65R17	106	V	XL	BSW	TL	✓	724	228	6.5

TERRAMASTER H/P



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
17	225/60R17	103	V	XL	BSW	TL	✓	702	228	6.5
	225/65R17	106	V	XL	BSW	TL	✓	724	228	6.5
	235/45R17	97	W	XL	BSW	TL	✓	644	236	8.0
	235/50R17	100	W	XL	BSW	TL	✓	668	245	7.5
	235/55R17	103	W	XL	BSW	TL	✓	690	245	7.5
	235/65R17	108	V	XL	BSW	TL	✓	738	240	7.0
	245/40R17	95	W	XL	BSW	TL	✓	628	248	8.5
	245/45R17	99	W	XL	BSW	TL	✓	652	243	8.0
	255/40R17	94	V		BSW	TL	✓	636	260	9.0
	205/40R18	86	W	XL	BSW	TL	✓	621	212	7.5
	215/40R18	89	W	XL	BSW	TL	✓	629	218	7.5
	215/45R18	93	W	XL	BSW	TL	✓	651	213	7.0
	215/50R18	92	W		BSW	TL	✓	673	226	7.0
	215/55R18	99	V	XL	BSW	TL	✓	693	226	7.0
18	225/40R18	92	W	XL	BSW	TL	✓	637	230	8.0
	225/45R18	95	W	XL	BSW	TL	✓	659	225	7.5
	225/50R18	99	W	XL	BSW	TL	✓	683	233	7.0
	225/55R18	98	V		BSW	TL	✓	705	233	7.0
	225/60R18	100	H		BSW	TL	✓	727	228	6.5
	235/40R18	95	W	XL	BSW	TL	✓	645	241	8.5
	235/45R18	98	W	XL	BSW	TL	✓	669	236	8.0
	235/50R18	101	W	XL	BSW	TL	✓	693	245	7.5
	235/55R18	104	W	XL	BSW	TL	✓	715	245	7.5
	235/60R18	107	V	XL	BSW	TL	✓	739	240	7.0
	245/40R18	97	W	XL	BSW	TL	✓	653	248	8.5
	245/45R18	100	W	XL	BSW	TL	✓	677	243	8.0
	255/35R18	94	W	XL	BSW	TL	✓	635	260	9.0
	255/40R18	99	W	XL	BSW	TL	✓	661	260	9.0
19	255/45R18	103	W	XL	BSW	TL	✓	687	255	8.5
	255/55R18	109	W	XL	BSW	TL	✓	737	265	8.0
	255/60R18	112	V	XL	BSW	TL	✓	763	260	7.5
	265/35R18	97	W	XL	BSW	TL	✓	643	271	9.5
	205/55R19	97	V	XL	BSW	TL	✓	709	214	6.5
	225/35R19	88	W	XL	BSW	TL	✓	641	230	8.0
	225/40R19	93	W	XL	BSW	TL	✓	663	230	8.0
	225/45R19	96	W	XL	BSW	TL	✓	685	225	7.5
	225/55R19	103	V		BSW	TL	✓	731	233	7.0
	235/35R19	91	W	XL	BSW	TL	✓	647	241	8.5
	235/40R19	96	W	XL	BSW	TL	✓	671	241	8.5

TERRAMASTER H/P



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
19	235/45R19	99	W	XL	BSW	TL	√	695	236	8.0
	235/50R19	103	W	XL	BSW	TL	√	719	245	7.5
	235/55R19	105	V	XL	BSW	TL	√	741	245	7.5
	245/35R19	93	W	XL	BSW	TL	√	655	248	8.5
	245/40R19	98	W	XL	BSW	TL	√	679	248	8.5
	245/45R19	102	W	XL	BSW	TL	√	703	243	8.0
	255/35R19	96	W	XL	BSW	TL	√	661	260	9.0
	255/40R19	100	W	XL	BSW	TL	√	687	260	9.0
	255/45R19	104	W	XL	BSW	TL	√	713	255	8.5
	255/50R19	107	W	XL	BSW	TL	√	739	265	8.0
	255/55R19	111	W	XL	BSW	TL	√	763	265	8.0
	265/35R19	98	W	XL	BSW	TL	√	669	271	9.5
	275/35R19	100	W	XL	BSW	TL	√	675	278	9.5
	275/40R19	105	W	XL	BSW	TL	√	703	278	9.5
20	195/50R20	93	H	XL	BSW	TL	√	704	201	6.0
	195/55R20	95	H	XL	BSW	TL	√	722	201	6.0
	245/35R20	95	W	XL	BSW	TL	√	680	248	8.5
	245/40R20	99	W	XL	BSW	TL	√	704	248	8.5
	245/45R20	103	W	XL	BSW	TL	√	728	243	8.0
	255/35R20	97	W	XL	BSW	TL	√	686	260	9.0
	255/40R20	101	Y	XL	BSW	TL	√	712	260	9.0
	255/45R20	105	W	XL	BSW	TL	√	738	255	8.5
	255/50R20	109	W	XL	BSW	TL	√	764	265	8.0
	275/30R20	97	W	XL	BSW	TL	√	674	278	9.5
	275/35R20	102	W	XL	BSW	TL	√	700	278	9.5
	275/40R20	106	Y	XL	BSW	TL	√	728	278	9.5
	275/45R20	110	Y	XL	BSW	TL	√	756	273	9.0
	315/35R20	110	Y	XL	BSW	TL	√	728	320	11.0
21	275/40R21	107	Y	XL	BSW	TL	√	753	278	9.5
	315/35R21	111	Y	XL	BSW	TL	√	753	320	11.0



TRANSMASTER VAN

TRANSMASTER VAN, with significant developmental advances in sustainability, has an increased mileage/durability, and lower rolling resistance.



Features & benefits

- with a higher block/void ratio optimised pattern, the specilized van tyre tread compound enhanced mileage greatly.
- The innovative groove design improves the noise level comfort.While keeping a consistently high wet performance.
- The new design, with optimized pitch-alignment, ensures better noise absorption and less sound creation for a van tyre.


Wet Traction


Comfortable


Control


Mileage

TRANSMASTER VAN

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
14	175/65R14C	90/88	T	6PR	BSW	TL	√	584	177	5.0
	175/70R14C	95/93	S	6PR	BSW	TL	√	602	177	5.0
	185R14C	102/100	R	8PR	BSW	TL	√	650	188	5.5
	195R14C	106/104	Q	8PR	BSW	TL	√	666	198	5.5
15	195/70R15C	104/102	R	8PR	BSW	TL	√	655	201	6.0
	205/70R15C	106 /104	R	8PR	BSW	TL	√	669	209	6.0
	215/65R15C	104/102	T	6PR	BSW	TL	√	661	221	6.5
	215/70R15C	109/107	R	8PR	BSW	TL	√	683	221	6.5
16	225/70R15C	112/110	R	8PR	BSW	TL	√	697	228	6.5
	185/75R16C	104/102	R	8PR	BSW	TL	√	684	184	5.0
	195/60R16C	99/97	H	6PR	BSW	TL	√	640	201	6.0
	195/65R16C	104/102	T	8PR	BSW	TL	√	660	201	6.0
16	195/75R16C	107/105	R	8PR	BSW	TL	√	698	196	5.5
	205/65R16C	107/105	T	8PR	BSW	TL	√	672	209	6.0
	205/75R16C	110/108	Q	8PR	BSW	TL	√	714	203	5.5
	215/60R16C	108/106	T	8PR	BSW	TL	√	686	221	6.5
16	215/65R16C	109/107	T	8PR	BSW	TL	√	686	221	6.5
	215/75R16C	113/111	Q	8PR	BSW	TL	√	728	216	6.0
	225/65R16C	112/110	T	8PR	BSW	TL	√	698	228	6.5
	225/75R16C	118/116	R	10PR	BSW	TL	√	744	223	6.0
16	235/65R16C	115/113	R	8PR	BSW	TL	√	712	240	7.0

RANGE	14-16
SPEED RATE	H/Q/R/S/T
ASPECT RATIO	60-80
SECTION WIDTH	175-235

ADVANFORS VAN

The ADVANFORS VAN, the finest van/light truck commercial tire for Europe, is engineered to meet the multi-purpose needs of safety, durability, comfort and efficiency.



Features & benefits

- Strong design, extra-durable construction offers durability and excellent wear resistance.
- Greatly enhanced tread design delivers confident and reliable handling across a variety of road and weather conditions.
- High mileage combined with fuel economy, low operating costs over the long term, boosting your profitability.


Wet Traction


Comfortable


Control


Mileage

RANGE	14-17
SPEED RATE	R/S/T
ASPECT RATIO	60-80
SECTION WIDTH	175-235

ADVANFORS VAN

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
14	175/65R14C	90/88	T	6PR	BSW	TL	√	584	177	5.0
	175/70R14C	95/93	T	6PR	BSW	TL	√	602	177	5.0
	185R14C	102/100	S	8PR	BSW	TL	√	650	188	5.5
	195R14C	106/104	S	8PR	BSW	TL	√	666	198	5.5
15	195/70R15C	104/102	S	8PR	BSW	TL	√	655	201	6.0
	205/70R15C	106/104	S	8PR	BSW	TL	√	669	209	6.0
	215/65R15C	104/102	T	6PR	BSW	TL	√	661	221	6.5
	215/70R15C	109/107	S	8PR	BSW	TL	√	683	221	6.5
	225/70R15C	112/110	S	8PR	BSW	TL	√	697	228	6.5
	185/75R16C	104/102	S	8PR	BSW	TL	√	684	184	5.0
16	195/65R16C	104/102	T	8PR	BSW	TL	√	660	201	6.0
	195/75R16C	107/105	S	8PR	BSW	TL	√	698	196	5.5
	195/75R16C	110/108	R	10PR	BSW	TL	√	698	196	5.5
	205/65R16C	107/105	T	8PR	BSW	TL	√	672	209	6.0
	205/75R16C	110/108	S	8PR	BSW	TL	√	714	203	5.5
	205/75R16C	113/111	R	10PR	BSW	TL	√	714	203	5.5
	215/60R16C	103/101	T	6PR	BSW	TL	√	686	221	6.5
	215/65R16C	109/107	T	8PR	BSW	TL	√	686	221	6.5
	215/75R16C	113/111	S	8PR	BSW	TL	√	728	216	6.0
	225/65R16C	112/110	T	8PR	BSW	TL	√	698	228	6.5
17	225/75R16C	121/120	R	10PR	BSW	TL	√	744	223	6.0
	235/65R16C	115/113	T	8PR	BSW	TL	√	712	240	7.0
	235/65R16C	121/119	R	10PR	BSW	TL	√	712	240	7.0
	215/60R17C	109/107	T	8PR	BSW	TL	√	690	221	6.5



SUV/4x4 TYRE FAMILY

Designed for SUV/4x4 tyres, they are a native engineering innovation for the heavier weight, greater power, variable center of gravity, and complex all - terrain driving environments of SUVs and four - wheel - drive vehicles. The core design philosophy balances on - road driving comfort and refinement with the rugged resilience for off - road adventures.



ADVANFORS SUV

ADVANFORS A/T

ADVANFORS A/TII

ADVANFORS SUV

UTQG: 460 A A

Thanks to the new generation of year-round compounding technologies, ADVANFORS SUV delivering excellent wet braking performance, integrated within the tread pattern design evacuates water effectively for enhanced wet grip.



Features & benefits

- Stylish and strong shoulder design to form enough ground contact in the outside area for crisp cornering.
- Wide longitudinal grooves and shoulder lateral opening provide optimum drainage when driving straight ahead.
- The whole 3-D edges design for smooth tread block entry in footprint to improve acoustic comfort.
- Specifically for high performance electric and plug-in vehicles.

M+S

Wet Traction

Control

Mileage

Efficiency

RANGE	15-20
SPEED RATE	T/H/V
ASPECT RATIO	45-75
SECTION WIDTH	215-285

ADVANFORS SUV

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
15	215/75R15	100	T		BSW	TL	√	703	216	6.0
	235/75R15	109	T	XL	BSW	TL	√	733	235	6.5
	215/70R16	100	H		BSW	TL	√	708	221	6.5
	225/70R16	107	H	XL	BSW	TL	√	722	228	6.5
16	235/70R16	106	H		BSW	TL	√	736	240	7.0
	245/70R16	111	H	XL	BSW	TL	√	750	248	7.0
	255/65R16	109	H		BSW	TL	√	738	260	7.5
	255/70R16	111	H		BSW	TL	√	764	260	7.5
	265/70R16	112	H		BSW	TL	√	778	272	8.0
	275/70R16	114	H		BSW	TL	√	792	279	8.0
17	215/60R17	100	V	XL	BSW	TL	√	690	221	6.5
	215/65R17	99	H		BSW	TL	√	712	221	6.5
	225/60R17	103	V	XL	BSW	TL	√	702	228	6.5
	225/65R17	102	H		BSW	TL	√	724	228	6.5
	235/60R17	106	V	XL	BSW	TL	√	714	240	7.0
	235/65R17	108	H	XL	BSW	TL	√	738	240	7.0
	245/65R17	111	H	XL	BSW	TL	√	750	248	7.0
	255/65R17	110	H		BSW	TL	√	764	260	7.5
	265/65R17	112	H		BSW	TL	√	776	272	8.0
	265/70R17	115	H		BSW	TL	√	804	272	8.0
18	275/65R17	115	H		BSW	TL	√	790	279	8.0
	285/65R17	116	H		BSW	TL	√	802	292	8.5
	215/50R18	92	V		BSW	TL	√	673	226	7.0
	215/55R18	99	V	XL	BSW	TL	√	693	226	7.0
	225/50R18	95	V		BSW	TL	√	683	233	7.0
	225/55R18	98	V		BSW	TL	√	705	233	7.0
	225/60R18	104	V	XL	BSW	TL	√	727	228	6.5
	235/50R18	101	V	XL	BSW	TL	√	693	245	7.5
	235/55R18	100	V		BSW	TL	√	715	245	7.5
	235/60R18	107	V	XL	BSW	TL	√	739	240	7.0
	235/65R18	110	H	XL	BSW	TL	√	763	240	7.0
	245/60R18	105	H		BSW	TL	√	751	248	7.0
	255/55R18	109	V	XL	BSW	TL	√	737	265	8.0
	255/60R18	112	V	XL	BSW	TL	√	763	260	7.5
19	255/70R18	113	H		BSW	TL	√	815	260	7.5
	265/60R18	114	V	XL	BSW	TL	√	775	272	8.0
	265/65R18	114	H		BSW	TL	√	801	272	8.0
	265/70R18	116	H		BSW	TL	√	829	272	8.0
	275/65R18	116	H		BSW	TL	√	815	279	8.0
	285/60R18	116	H		BSW	TL	√	799	292	8.5
	225/55R19	103	V	XL	BSW	TL	√	731	233	7.0
	235/50R19	103	V	XL	BSW	TL	√	719	245	7.5
	235/55R19	105	V	XL	BSW	TL	√	741	245	7.5
	245/55R19	107	V	XL	BSW	TL	√	753	253	7.5
	255/45R19	104	V	XL	BSW	TL	√	713	255	8.5
	255/50R19	107	V	XL	BSW	TL	√	739	265	8.0
	255/55R19	111	V	XL	BSW	TL	√	763	265	8.0
	265/55R19	109	V		BSW	TL	√	775	277	8.5

ADVANFORS SUV



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
20	235/55R20	105	V	XL	BSW	TL	√	766	245	7.5
	245/45R20	103	V	XL	BSW	TL	√	728	243	8.0
	245/50R20	102	V		BSW	TL	√	754	253	7.5
	255/45R20	105	V	XL	BSW	TL	√	738	255	8.5
	255/50R20	109	V	XL	BSW	TL	√	764	265	8.0
	255/55R20	110	V	XL	BSW	TL	√	788	265	8.0
	265/50R20	111	V	XL	BSW	TL	√	774	277	8.5
	265/55R20	113	V	XL	BSW	TL	√	800	277	8.5
	275/45R20	110	V	XL	BSW	TL	√	756	273	9.0
	275/55R20	117	V	XL	BSW	TL	√	810	284	8.5
	275/60R20	116	V	XL	BSW	TL	√	838	279	8.0
	285/50R20	116	V	XL	BSW	TL	√	794	297	9.0



ADVANFORS A/T

UTQG: 460 A A

The ADVANFORS A/T is an all-season tyre for SUV and CUV owners, and is an all terrain tyre specifically designed for road and off-road use.



ADVANFORS A/T

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	245/70R16	111	T	XL	BSW	TL	√	750	248	7.0
	245/75R16	111	T		BSW	TL	√	774	248	7.0
	265/70R16	112	T		BSW	TL	√	778	272	8.0
	275/70R16	114	T		BSW	TL	√	792	279	8.0
17	245/65R17	111	H	XL	BSW	TL	√	750	248	7.0
	265/65R17	112	H		BSW	TL	√	776	272	8.0
	265/70R17	115	T		BSW	TL	√	804	272	8.0
	275/65R17	115	H		BSW	TL	√	790	279	8.0
	285/65R17	116	H		BSW	TL	√	802	292	8.5
18	265/60R18	110	H		BSW	TL	√	775	272	8.0
	265/65R18	114	H		BSW	TL	√	801	272	8.0
	265/70R18	116	T		BSW	TL	√	829	272	8.0
	275/65R18	116	H		BSW	TL	√	815	279	8.0
	285/60R18	116	V		BSW	TL	√	799	292	8.5

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
15	255/70R15C	112/110	S	8PR	BSW	TL	√	739	260	7.5
16	205/75R16C	110/108	R	8PR	BSW	TL	√	714	203	5.5
	205R16C	110/108	S	8PR	BSW	TL	√	736	208	6.0
17	225/70R17C	112/110	S	10PR	BSW	TL	√	748	228	6.5

Features & benefits

- The unique symmetrical tread pattern design provides smooth driving performance on highways and urban roads, improving ride comfort.
- The anti abrasion layer design on the sidewall provides additional protection against many common dangers in harsh off-road condition.
- The irregular distribution of sipes and various pitch alignment significantly reduces tire noise.

M+S


Control


Stronger


Mileage


ON&OFF

RANGE	15-18
SPEED RATE	H/R/S/T/V
ASPECT RATIO	60-80
SECTION WIDTH	205-285

ADVANFORS A/T II

UTQG: 500 A A

Robust all-terrain adaptability and anti-tear tread design, balancing off-road escape capability and highway comfort, is a versatile and durable choice for core SUVs and pickups.



Features & benefits

- Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.
- The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.
- The block tread design with multiple sipes provide outstanding off-road traction and reduce tread damage on off-road condition.

M+S


Stronger


ON&OFF


Control


Mileage

RANGE	15-20
SPEED RATE	S/T/Q
ASPECT RATIO	50-80
SECTION WIDTH	205-285

ADVANFORS A/T II

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	205/80R16	104	S	XL	BSW	TL	√	734	203	5.5
	215/70R16	100	S		BSW	TL	√	708	221	6.5
	225/70R16	103	S		BSW	TL	√	722	228	6.5
	235/70R16	106	S		BSW	TL	√	736	240	7.0
	245/70R16	111	S	XL	BSW	TL	√	750	248	7.0
	245/75R16	111	S		BSW	TL	√	774	248	7.0
	265/70R16	112	T		BSW	TL	√	778	272	8.0
	265/75R16	116	T		BSW	TL	√	804	267	7.5
17	225/65R17	102	T		BSW	TL	√	724	228	6.5
	235/65R17	104	S		BSW	TL	√	738	240	7.0
	245/65R17	107	S		BSW	TL	√	750	248	7.0
	255/70R17	112	T		BSW	TL	√	790	260	7.5
	265/65R17	112	T		BSW	TL	√	776	272	8.0
	265/70R17	115	T		BSW	TL	√	804	272	8.0
18	255/60R18	112	T	XL	BSW	TL	√	763	260	7.5
	265/60R18	110	T		BSW	TL	√	775	272	8.0
	265/65R18	116	T	XL	BSW	TL	√	801	272	8.0
	285/60R18	120	T	XL	BSW	TL	√	799	292	8.5
20	265/50R20	111	T	XL	BSW	TL	√	774	277	8.5
	275/55R20	117	T	XL	BSW	TL	√	810	284	8.5

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
15	LT215/75R15	100/97	Q	6PR	BSW	TL	√	703	216	6.0
	LT235/75R15	110/107	Q	8PR	BSW	TL	√	733	235	6.5
	31X10.50R15LT	109	Q	6PR	BSW	TL	√	775	268	8.5
	33X12.50R15LT	108	Q	6PR	BSW	TL	√	826	318	10.0
16	LT225/75R16	115/112	Q	10PR	BSW	TL	√	722	228	6.5
	LT245/70R16	118/115	Q	8PR	BSW	TL	√	750	248	7.0
	LT245/75R16	120/116	Q	10PR	BSW	TL	√	774	248	7.0
	LT265/70R16	121/118	R	10PR	BSW	TL	√	778	272	8.0
	LT265/75R16	123/120	Q	10PR	BSW	TL	√	804	267	7.5
	LT285/75R16	126/123	Q	10PR	BSW	TL	√	834	286	8.0
17	LT245/65R17	117/114	Q	8PR	BSW	TL	√	750	248	7.0
	LT245/70R17	119/116	Q	10PR	BSW	TL	√	776	248	7.0
	LT265/65R17	120/117	Q	10PR	BSW	TL	√	776	272	8.0
	LT265/70R17	123/120	Q	10PR	BSW	TL	√	804	272	8.0
	LT285/70R17	126/123	Q	8PR	BSW	TL	√	832	292	8.5
	LT315/70R17	126/123	Q	10PR	BSW	TL	√	874	323	9.5
18	LT265/60R18	119/116	Q	10PR	BSW	TL	√	775	272	8.0
	LT265/70R18	124/121	Q	10PR	BSW	TL	√	829	272	8.0
	LT275/70R18	125/122	Q	10PR	BSW	TL	√	843	279	8.0
	LT285/65R18	125/122	Q	10PR	BSW	TL	√	827	292	8.5
20	LT275/55R20	120/117	Q	10PR	BSW	TL	√	810	284	8.5
	LT285/55R20	122/119	Q	10PR	BSW	TL	√	822	297	9.0
	33X12.50R20LT	114	Q	10PR	BSW	TL	√	826	318	10.0
	33X12.50R20LT	119	Q	12PR	BSW	TL	√	826	318	10.0
	35X12.50R20LT	121	Q	10PR	BSW	TL	√	877	318	10.0
	35X12.50R20LT	125	Q	12PR	BSW	TL	√	877	318	10.0



ALL SEASON TYRE FAMILY

Designed for all-season driving needs, ALL SEASON tires are a comprehensive solution engineered to adapt to various climates and road conditions. The core design philosophy balances dry road grip, stability on wet surfaces, and passability in light snow and icy conditions, while maintaining quiet comfort and long-lasting wear resistance for daily driving. Through unique tread patterns and a compound rubber formula, they aim to provide reliable and consistent performance in response to common weather changes, ensuring composed and adaptable performance for vehicles in daily travel throughout the seasons.




TERRAMASTER A/S

TRANSMASTER VAN A/S

TERRAMASTER A/S

The TERRAMASTER A/S is designed to perform in every climate condition, with excellent wet and dry braking and maintain traction and stability whether driving in wet or dry conditions.



Features & benefits

- Wide lateral grooves,Improved drain performance with wide and high angled grooves.
- High-density summer sipes Enhanced block stiffness provides better driving performance on dry roads.
- Pitch variation technology Optimized pitch variation technology provides more comfortable driving.

M+S



RANGE	13-19
SPEED RATE	H/T/V/W/Y
ASPECT RATIO	35-80
SECTION WIDTH	155-255

TERRAMASTER A/S

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	155/65R13	73	T		BSW	TL	√	532	157	4.5
	155/70R13	75	T		BSW	TL	√	548	157	4.5
	155/80R13	79	T		BSW	TL	√	578	157	4.5
	165/70R13	79	T		BSW	TL	√	562	170	5.0
	165/70R13	83	T	XL	BSW	TL	√	562	170	5.0
	175/70R13	82	T		BSW	TL	√	576	177	5.0
14	155/65R14	75	T		BSW	TL	√	558	157	4.5
	165/60R14	79	H	XL	BSW	TL	√	554	170	5.0
	165/65R14	79	T		BSW	TL	√	570	170	5.0
	165/70R14	81	T		BSW	TL	√	588	170	5.0
	175/65R14	82	T		BSW	TL	√	584	177	5.0
	175/65R14	86	T	XL	BSW	TL	√	584	177	5.0
	175/70R14	84	T		BSW	TL	√	602	177	5.0
	175/70R14	88	T	XL	BSW	TL	√	602	177	5.0
	185/60R14	82	H		BSW	TL	√	578	189	5.5
	185/65R14	86	H		BSW	TL	√	596	189	5.5
15	185/70R14	88	T		BSW	TL	√	616	189	5.5
	195/70R14	91	T		BSW	TL	√	630	201	6.0
	165/65R15	81	H		BSW	TL	√	595	170	5.0
	175/65R15	84	H		BSW	TL	√	609	177	5.0
	185/55R15	82	H		BSW	TL	√	585	194	6.0
	185/60R15	88	H	XL	BSW	TL	√	603	189	5.5
	185/65R15	88	H		BSW	TL	√	621	189	5.5
	185/65R15	92	H	XL	BSW	TL	√	621	189	5.5
	195/50R15	82	V		BSW	TL	√	577	201	6.0
	195/55R15	85	V		BSW	TL	√	595	201	6.0
	195/60R15	88	V		BSW	TL	√	615	201	6.0
	195/65R15	91	H		BSW	TL	√	635	201	6.0
	195/65R15	95	H	XL	BSW	TL	√	635	201	6.0
	205/65R15	94	V		BSW	TL	√	627	209	6.0
	215/65R15	96	H		BSW	TL	√	661	221	6.5

TERRAMASTER A/S



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	195/45R16	84	V	XL	BSW	TL	✓	582	195	6.5
	195/50R16	88	V	XL	BSW	TL	✓	602	201	6.0
	195/55R16	91	V	XL	BSW	TL	✓	620	201	6.0
	195/60R16	89	V		BSW	TL	✓	640	201	6.0
	205/45ZR16	87	W	XL	BSW	TL	✓	590	206	7.0
	205/50ZR16	91	W	XL	BSW	TL	✓	612	214	6.5
	205/55R16	91	V		BSW	TL	✓	632	214	6.5
	205/55R16	94	V	XL	BSW	TL	✓	632	214	6.5
	205/60R16	96	V	XL	BSW	TL	✓	652	209	6.0
	215/45R16	90	V	XL	BSW	TL	✓	600	213	7.0
	215/55ZR16	97	W	XL	BSW	TL	✓	642	226	7.0
	215/60R16	99	V	XL	BSW	TL	✓	664	221	6.5
	215/65R16	98	V		BSW	TL	✓	686	221	6.5
	225/55ZR16	99	W	XL	BSW	TL	✓	654	233	7.0
	225/60R16	102	V	XL	BSW	TL	✓	676	228	6.5
17	205/45ZR17	88	W	XL	BSW	TL	✓	616	206	7.0
	205/50ZR17	93	W	XL	BSW	TL	✓	638	214	6.5
	205/55ZR17	95	W	XL	BSW	TL	✓	658	214	6.5
	215/40ZR17	87	W	XL	BSW	TL	✓	604	218	7.5
	215/45ZR17	91	W	XL	BSW	TL	✓	626	213	7.0
	215/50ZR17	95	W	XL	BSW	TL	✓	648	226	7.0
	215/55ZR17	98	W	XL	BSW	TL	✓	668	226	7.0
	215/60R17	100	V	XL	BSW	TL	✓	690	221	6.5
	215/65R17	99	V		BSW	TL	✓	712	221	6.5
	225/45ZR17	94	Y	XL	BSW	TL	✓	634	225	7.5
	225/50ZR17	98	Y	XL	BSW	TL	✓	658	233	7.0
	225/55ZR17	101	W	XL	BSW	TL	✓	680	233	7.0
	225/60R17	103	V	XL	BSW	TL	✓	702	228	6.5
	225/65R17	106	V	XL	BSW	TL	✓	724	228	6.5
	235/45ZR17	97	W	XL	BSW	TL	✓	644	236	8.0
	235/55ZR17	103	W	XL	BSW	TL	✓	690	245	7.5
	235/65ZR17	108	W	XL	BSW	TL	✓	738	240	7.0


TERRAMASTER A/S



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
18	215/55R18	99	V	XL	BSW	TL	✓	693	226	7.0
	225/40ZR18	92	Y	XL	BSW	TL	✓	637	230	8.0
	225/45ZR18	95	W	XL	BSW	TL	✓	659	225	7.5
	225/55R18	98	V		BSW	TL	✓	705	233	7.0
	235/45ZR18	98	Y	XL	BSW	TL	✓	669	236	8.0
	235/50ZR18	101	W	XL	BSW	TL	✓	693	245	7.5
	235/55R18	104	V	XL	BSW	TL	✓	715	245	7.5
	235/60ZR18	107	W	XL	BSW	TL	✓	739	240	7.0
	245/40ZR18	97	Y	XL	BSW	TL	✓	653	248	8.5
	245/45ZR18	100	Y	XL	BSW	TL	✓	677	243	8.0
19	225/40ZR19	93	Y	XL	BSW	TL	✓	663	230	8.0
	225/45ZR19	96	Y	XL	BSW	TL	✓	685	225	7.5
	225/55ZR19	99	W		BSW	TL	✓	731	233	7.0
	235/55ZR19	105	W	XL	BSW	TL	✓	741	245	7.5
	245/45ZR19	102	Y	XL	BSW	TL	✓	703	243	8.0
	255/35ZR19	96	Y	XL	BSW	TL	✓	661	260	9.0
	255/40ZR19	100	Y	XL	BSW	TL	✓	687	260	9.0

TRANSMASTER VAN A/S

The TRANSMASTER VAN A/S is a durable all-weather touring tire for sedans and crossovers. It features fuel savings and optimized mileage shorter braking distances in the wet, and extended tread life.



TRANSMASTER VAN A/S

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
14	175/65R14C	90/88	T	6PR	BSW	TL	√	584	177	5.0
	175/70R14C	95/93	T	6PR	BSW	TL	√	602	177	5.0
15	195/70R15C	104/102	S	8PR	BSW	TL	√	655	201	6.0
	215/70R15C	109/107	S	8PR	BSW	TL	√	683	221	6.5
	225/70R15C	112/110	S	8PR	BSW	TL	√	697	228	6.5
	185/75R16C	104/102	S	8PR	BSW	TL	√	684	184	5.0
16	195/60R16C	99/97	H	6PR	BSW	TL	√	640	201	6.0
	195/65R16C	104/102	S	8PR	BSW	TL	√	660	201	6.0
	195/75R16C	107/105	S	8PR	BSW	TL	√	698	196	5.5
	205/65R16C	107/105	T	8PR	BSW	TL	√	672	209	6.0
	205/75R16C	113/111	S	10PR	BSW	TL	√	714	203	5.5
	215/60R16C	103/101	T	6PR	BSW	TL	√	664	221	6.5
	215/65R16C	109/107	T	8PR	BSW	TL	√	686	221	6.5
	215/75R16C	113/111	S	8PR	BSW	TL	√	728	216	6.0
	225/65R16C	112/110	S	8PR	BSW	TL	√	698	228	6.5
	235/65R16C	115/113	S	8PR	BSW	TL	√	712	240	7.0
	235/65R16C	121/119	R	10PR	BSW	TL	√	712	240	7.0

Features & benefits

- Straight 3-channel waterway Resists hydroplaning for a safer drive in wet road conditions.
- Wide shoulder blocks are applied for a better grip and maximum road contact. Groove width is optimized for all-season performance.
- The product's construction with 3D sipes, provides outstanding grip performance on dry in all season conditions.

M+S


Wet Traction


Control


Mileage


Efficiency

RANGE	14-16
SPEED RATE	H/R/S/T
ASPECT RATIO	60-75
SECTION WIDTH	175-235



COMMERCIAL TYRE FAMILY

These tyres are a native innovation built for high load capacity, relentless urban stop-and-go cycles, and extended mileage requirements. The core design philosophy masterfully balances durable, fuel-efficient performance on paved roads with the robust resilience to withstand job site hazards and uneven surfaces, ensuring maximum uptime and cost-effectiveness.

ADVANFORS MAX

CATCHFORS MAX

ADVANFORS MAX

ADVANFORS MAX features an optimized tread design, reinforced shoulder blocks, and continuous circumferential ribs, providing stable grip, mileage, and load-carrying, and uses a dedicated truck tread compound to achieve high mileage and fuel efficiency.



ADVANFORS MAX

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
12	145R12C	86/84	Q	8PR	BSW	TL	√	237	145	4.0
	155R12C	88/86	Q	8PR	BSW	TL	√	550	157	4.5
13	155R13C	90/88	Q	8PR	BSW	TL	√	578	157	4.5
	165R13C	91/89	R	8PR	BSW	TL	√	596	167	4.5
14	165/70R14C	89/87	R	6PR	BSW	TL	√	588	170	5.0
	175/65R14C	90/88	T	6PR	BSW	TL	√	584	177	5.0
	175/70R14C	95/93	R	6PR	BSW	TL	√	602	177	5.0
	185R14C	102/100	R	8PR	BSW	TL	√	650	188	5.5
	195R14C	106/104	R	8PR	BSW	TL	√	666	198	5.5
	195/70R15C	104/102	R	8PR	BSW	TL	√	655	201	6.0
15	195R15C	106/104	R	8PR	BSW	TL	√	690	198	5.5
	205/65R15C	102/100	T	6PR	BSW	TL	√	647	209	6.0
	205/70R15C	106 /104	R	8PR	BSW	TL	√	669	209	6.0
	215/65R15C	104/102	T	6PR	BSW	TL	√	661	221	6.5
	215/70R15C	109/107	R	8PR	BSW	TL	√	683	221	6.5
	225/70R15C	112/110	R	8PR	BSW	TL	√	697	228	6.5
16	185/75R16C	104/102	R	8PR	BSW	TL	√	684	184	5.0
	195/65R16C	104/102	T	8PR	BSW	TL	√	660	201	6.0
	195/75R16C	107/105	R	8PR	BSW	TL	√	698	196	5.5
	205/65R16C	107/105	T	8PR	BSW	TL	√	672	209	6.0
	205/75R16C	110/108	R	8PR	BSW	TL	√	714	203	5.5
	215/65R16C	109/107	T	8PR	BSW	TL	√	686	221	6.5
	215/75R16C	113/111	R	8PR	BSW	TL	√	728	216	6.0
	225/65R16C	112/110	T	8PR	BSW	TL	√	698	228	6.5
	225/75R16C	121/120	R	12PR	BSW	TL	√	744	223	6.0
	235/65R16C	121/119	R	12PR	BSW	TL	√	712	240	7.0

Features & benefits

- Strong shoulder blocks and continous cirfumferential large ribs for stable gripping, mileage and heavy duty.
- Combination construction of 2-ply polyesters and wide steel belts provide outstanding durability, with high safety factors.
- Zig-zag grooves offers enhanced traction in wet conditions.
- Specialized van tread compound for high-mileage and fuel efficiency.

M+S



Efficiency



Mileage



Control



Load


RANGE	12-16
SPEED RATE	Q/R/T
ASPECT RATIO	65-80
SECTION WIDTH	145-235

CATCHFORS MAX

Rim (inch)	Tire Size	Load Index	Speed Symbol	PR	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	185/75R16C	104/102	R	8PR	BSW	TL	√	684	184	5.0
	195/75R16C	107/105	R	8PR	BSW	TL	√	698	196	5.5

CATCHFORS MAX

CATCHFORS MAX is a premium pattern for light trucks and commercial vans, unique pattern design and compound provides ahiger load carrying capacity, superior handling, durability and ride comfort.



Features & benefits

- | Zigzag main grooves increased tread rigidity, good prevention of irregular wear under high-load operation.
- | 3D shoulder design provide good traction and braking performance on tough road conditions.
- | Multi-sipe design provide good handling and braking performance.
- | Tread block design improves grip performance.

M+S



RANGE	16
SPEED RATE	R
ASPECT RATIO	75
SECTION WIDTH	185-195





WINTER TYRE FAMILY

These tyres are a dedicated innovation to combat the unique challenges of ice, snow, and freezing temperatures. The core design philosophy prioritizes maximum safety and control, delivering exceptional traction and shortened braking distances on slippery surfaces, without compromising on stable and confident handling on cold, dry roads.



SNOWMASTER


ARCTICBLAZER

ARCTICBLAZER SUV

ARCTIC POWER

SNOWMASTER

SNOWMASTER is a non-pitted winter tyre specifically designed for SUVs and CUVs. It offers reliable grip and control, performing well in snowy, icy conditions and cold weather. With advanced winter formula and tread technology, it excels in harsh environments.



Features & benefits

- The fine grooves on the tyre tread instantly absorb the thin water film between the tyre and the snow through capillary action, enabling the vehicle to drive freely on the snowy surface.
- The special tyre tread low-temperature formula can still maintain physical properties such as elasticity even at low temperatures.
- The centrifugal pump effect produced by the V-shaped pattern results in excellent drainage performance.

M+S



RANGE	13-20
SPEED RATE	H/T/V
ASPECT RATIO	35-80
SECTION WIDTH	155-275

SNOWMASTER

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	155/70R13	75	T		BSW	TL	√	548	157	4.5
	155/80R13	79	T		BSW	TL	√	578	157	4.5
	175/70R13	82	T		BSW	TL	√	576	177	5.0
14	155/65R14	75	T		BSW	TL	√	558	157	4.5
	165/65R14	79	T		BSW	TL	√	570	170	5.0
	165/70R14	81	T		BSW	TL	√	588	170	5.0
	165/70R14	85	T	XL	BSW	TL	√	588	170	5.0
	175/65R14	82	T		BSW	TL	√	584	170	5.0
	175/65R14	86	T	XL	BSW	TL	√	584	170	5.0
	175/70R14	84	T		BSW	TL	√	602	177	5.0
	185/60R14	82	T		BSW	TL	√	578	189	5.5
	185/65R14	86	T		BSW	TL	√	596	189	5.5
15	165/60R15	81	T	XL	BSW	TL	√	579	170	5.0
	165/65R15	81	T		BSW	TL	√	595	170	5.0
	175/65R15	88	H	XL	BSW	TL	√	609	170	5.0
	185/55R15	86	V	XL	BSW	TL	√	585	194	6.0
	185/60R15	84	T		BSW	TL	√	603	189	5.5
	185/60R15	88	T	XL	BSW	TL	√	603	189	5.5
	185/65R15	88	H		BSW	TL	√	621	189	5.5
	185/65R15	92	T	XL	BSW	TL	√	621	189	5.5
	195/50R15	86	H	XL	BSW	TL	√	577	201	6.0
	195/55R15	85	H		BSW	TL	√	595	201	6.0
	195/60R15	92	H	XL	BSW	TL	√	615	201	6.0
	195/65R15	91	H		BSW	TL	√	635	201	6.0
	195/65R15	95	T	XL	BSW	TL	√	635	201	6.0
	205/65R15	94	H		BSW	TL	√	647	209	6.0
	205/70R15	96	T		BSW	TL	√	669	209	6.0
16	195/45R16	84	V	XL	BSW	TL	√	582	195	6.5
	195/55R16	91	V	XL	BSW	TL	√	620	201	6.0
	205/55R16	91	H		BSW	TL	√	632	214	6.5
	205/55R16	94	H	XL	BSW	TL	√	632	214	6.5
	205/60R16	92	H		BSW	TL	√	652	209	6.0
	205/60R16	96	H	XL	BSW	TL	√	652	209	6.0
	205/65R16	99	H	XL	BSW	TL	√	672	209	6.0
	215/55R16	97	H	XL	BSW	TL	√	642	226	7.0
	215/60R16	99	H	XL	BSW	TL	√	664	221	6.5
	215/65R16	98	H		BSW	TL	√	686	221	6.5
	215/70R16	104	H	XL	BSW	TL	√	708	221	6.5
	225/55R16	99	H	XL	BSW	TL	√	654	233	7.0

SNOWMASTER



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
17	205/45R17	88	V	XL	BSW	TL	√	616	206	7.0
	205/50R17	93	V	XL	BSW	TL	√	638	214	6.5
	205/55R17	95	V	XL	BSW	TL	√	658	214	6.5
	205/60R17	93	H		BSW	TL	√	678	209	6.0
	215/40R17	87	V	XL	BSW	TL	√	604	218	7.5
	215/45R17	91	V	XL	BSW	TL	√	626	213	7.0
	215/50R17	95	V	XL	BSW	TL	√	648	226	7.0
	215/55R17	98	V	XL	BSW	TL	√	668	226	7.0
	215/60R17	96	H		BSW	TL	√	690	221	6.5
	215/65R17	103	V	XL	BSW	TL	√	712	221	6.5
	225/45R17	94	V	XL	BSW	TL	√	634	225	7.5
	225/50R17	98	V	XL	BSW	TL	√	658	233	7.0
	225/55R17	101	V	XL	BSW	TL	√	680	233	7.0
	225/60R17	99	H		BSW	TL	√	702	228	6.5
	225/65R17	102	H		BSW	TL	√	724	228	6.5
	235/45R17	97	V	XL	BSW	TL	√	644	236	8.0
	235/55R17	103	V	XL	BSW	TL	√	690	245	7.5
	235/65R17	108	H	XL	BSW	TL	√	738	240	7.0
	245/45R17	99	V	XL	BSW	TL	√	652	243	8.0
	245/65R17	111	H	XL	BSW	TL	√	750	248	7.0
	265/65R17	112	T		BSW	TL	√	776	272	8.0
18	215/55R18	99	V	XL	BSW	TL	√	693	226	7.0
	225/40R18	92	V	XL	BSW	TL	√	637	230	8.0
	225/45R18	95	V	XL	BSW	TL	√	695	225	7.5
	225/50R18	99	V	XL	BSW	TL	√	683	233	7.0
	225/55R18	102	V	XL	BSW	TL	√	705	233	7.0
	225/60R18	104	H	XL	BSW	TL	√	727	228	6.5
	235/40R18	95	V	XL	BSW	TL	√	645	241	8.5
	235/45R18	98	V	XL	BSW	TL	√	669	236	8.0
	235/50R18	101	V	XL	BSW	TL	√	693	245	7.5
	235/55R18	104	V	XL	BSW	TL	√	715	245	7.5
	235/60R18	107	H	XL	BSW	TL	√	739	240	7.0
	245/40R18	97	V	XL	BSW	TL	√	653	248	8.5
	245/45R18	100	V	XL	BSW	TL	√	677	243	8.0
	255/55R18	109	V	XL	BSW	TL	√	737	265	8.0
	265/60R18	114	H	XL	BSW	TL	√	775	272	8.0


SNOWMASTER



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
19	225/40R19	93	V	XL	BSW	TL	√	663	230	8.0
	225/45R19	96	V	XL	BSW	TL	√	685	225	7.5
	225/55R19	103	V	XL	BSW	TL	√	731	233	7.0
	235/35R19	91	V	XL	BSW	TL	√	647	241	8.5
	235/50R19	103	V	XL	BSW	TL	√	719	245	7.5
	235/55R19	105	V	XL	BSW	TL	√	741	245	7.5
	245/40R19	98	V	XL	BSW	TL	√	679	248	8.5
	245/45R19	102	V	XL	BSW	TL	√	703	243	8.0
	255/35R19	96	V	XL	BSW	TL	√	661	260	9.0
	255/40R19	100	V	XL	BSW	TL	√	687	260	9.0
	255/50R19	107	V	XL	BSW	TL	√	739	265	8.0
	245/45R20	103	V	XL	BSW	TL	√	728	243	8.0
20	255/45R20	105	V	XL	BSW	TL	√	738	255	8.5
	255/50R20	109	V	XL	BSW	TL	√	764	265	8.0
	275/40R20	106	V	XL	BSW	TL	√	728	278	9.5

ARCTICBLAZER


ARCTICBLAZER is an asymmetrical modern snow tire featuring superior handling and traction under winter conditions.



Features & benefits

- High-density 3D ripple sipes improve overall wear pattern and traction on snow and icy surfaces.
- Silica-infused tread compound widens operational temperature range and increases traction on snow and ice.
- Pattern design offers superior handling and traction on snowy surfaces.

M+S

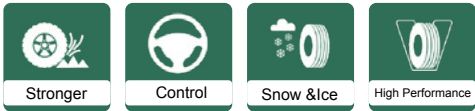

RANGE	13-20
SPEED RATE	H/T/V
ASPECT RATIO	40-70
SECTION WIDTH	175-265

ARCTICBLAZER

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	175/70R13	82	T		BSW	TL	√	576	177	5.0
	175/65R14	82	T		BSW	TL	√	584	177	5.0
	175/70R14	88	T	XL	BSW	TL	√	602	177	5.0
14	185/60R14	82	T		BSW	TL	√	578	189	5.5
	185/65R14	90	T	XL	BSW	TL	√	596	189	5.5
	185/70R14	92	T	XL	BSW	TL	√	616	189	5.5
	195/70R14	91	T		BSW	TL	√	630	201	6.0
	185/55R15	82	H		BSW	TL	√	585	194	6.0
15	185/60R15	88	T	XL	BSW	TL	√	603	189	5.5
	185/65R15	92	T	XL	BSW	TL	√	621	189	5.5
	195/55R15	89	H	XL	BSW	TL	√	595	201	6.0
	195/60R15	92	T	XL	BSW	TL	√	615	201	6.0
	195/65R15	95	T	XL	BSW	TL	√	635	201	6.0
	205/65R15	99	T	XL	BSW	TL	√	647	209	6.0
	205/70R15	100	T	XL	BSW	TL	√	669	209	6.0
	195/45R16	84	H	XL	BSW	TL	√	582	195	6.5
16	195/55R16	91	H	XL	BSW	TL	√	620	201	6.0
	205/55R16	94	H	XL	BSW	TL	√	632	214	6.5
	205/60R16	96	T	XL	BSW	TL	√	652	209	6.0
	205/65R16	99	T	XL	BSW	TL	√	672	209	6.0
	215/55R16	97	T	XL	BSW	TL	√	642	226	7.0
	215/60R16	99	T	XL	BSW	TL	√	664	221	6.5
	215/65R16	102	T	XL	BSW	TL	√	686	221	6.5
	215/70R16	100	T		BSW	TL	√	708	221	6.5
17	205/50R17	93	V	XL	BSW	TL	√	638	214	6.5
	215/45R17	91	V	XL	BSW	TL	√	626	213	7.0
	215/50R17	95	V	XL	BSW	TL	√	648	226	7.0
	215/55R17	98	V	XL	BSW	TL	√	668	226	7.0
	225/45R17	94	V	XL	BSW	TL	√	634	225	7.5
	225/50R17	98	V	XL	BSW	TL	√	658	233	7.0
	225/55R17	101	V	XL	BSW	TL	√	680	233	7.0
	235/45R17	97	V	XL	BSW	TL	√	644	236	8.0
	235/55R17	103	V	XL	BSW	TL	√	690	245	7.5

ARCTICBLAZER



Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
18	215/55R18	99	V	XL	BSW	TL	√	693	226	7.0
	225/40R18	92	V	XL	BSW	TL	√	653	248	8.5
	225/45R18	95	V	XL	BSW	TL	√	659	225	7.5
	225/50R18	95	V		BSW	TL	√	683	233	7.0
	225/55R18	98	V		BSW	TL	√	705	233	7.0
	235/45R18	98	V	XL	BSW	TL	√	669	236	8.0
	245/40R18	97	V	XL	BSW	TL	√	653	248	8.5
	245/45R18	100	V	XL	BSW	TL	√	677	243	8.0
19	235/40R19	96	V	XL	BSW	TL	√	671	241	8.5
	235/45R19	99	V	XL	BSW	TL	√	695	236	8.0
	245/40R19	98	V	XL	BSW	TL	√	679	248	8.5
	245/45R19	102	V	XL	BSW	TL	√	703	243	8.0
	265/55R19	113	T	XL	BSW	TL	√	775	277	8.5
20	235/55R20	102	V		BSW	TL	√	766	245	7.5
	245/45R20	103	V	XL	BSW	TL	√	728	243	8.0
	245/50R20	105	V	XL	BSW	TL	√	754	253	7.5
	255/45R20	105	V	XL	BSW	TL	√	738	255	8.5
	255/50R20	109	V	XL	BSW	TL	√	764	265	8.0



ARCTICBLAZER SUV


ARCTICBLAZER SUV is a contemporary ice tire for SUVs, boasting a saw-tooth tread design for exceptional handling and traction.



Features & benefits

- Large block tread design for increased traction and handling under snowy conditions.
- Unidirectional pattern provides improved snow clearing performance and consistent traction.
- Saw-toothed block and high-density sipe arrangement for improved grip on snow and ice.

M+S

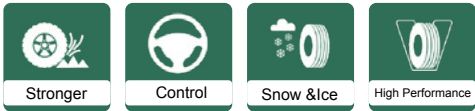


RANGE	16-22
SPEED RATE	H/T
ASPECT RATIO	40-70
SECTION WIDTH	215-285

ARCTICBLAZER SUV

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
16	235/70R16	106	T		BSW	TL	√	736	240	7.0
	255/70R16	111	T		BSW	TL	√	764	260	7.5
17	215/60R17	96	T		BSW	TL	√	690	221	6.5
	225/60R17	103	T	XL	BSW	TL	√	702	228	6.5
	225/65R17	102	T		BSW	TL	√	724	228	6.5
	235/65R17	108	T	XL	BSW	TL	√	738	240	7.0
	245/65R17	111	T	XL	BSW	TL	√	750	248	7.0
	245/70R17	110	T		BSW	TL	√	776	248	7.0
	255/65R17	110	T		BSW	TL	√	764	260	7.5
	265/65R17	112	T		BSW	TL	√	776	272	8.0
18	265/70R17	115	T		BSW	TL	√	804	272	8.0
	225/60R18	100	T		BSW	TL	√	727	228	6.5
	235/55R18	100	T		BSW	TL	√	715	245	7.5
	235/60R18	107	T	XL	BSW	TL	√	739	240	7.0
	235/65R18	106	T		BSW	TL	√	763	240	7.0
	245/50R18	104	H	XL	BSW	TL	√	703	253	7.5
	245/60R18	105	T		BSW	TL	√	751	248	7.0
	265/60R18	110	T		BSW	TL	√	775	272	8.0
19	265/65R18	114	T		BSW	TL	√	801	272	8.0
	225/45R19	96	H	XL	BSW	TL	√	685	225	7.5
	225/55R19	99	H		BSW	TL	√	731	233	7.0
	235/50R19	103	H	XL	BSW	TL	√	719	245	7.5
	235/55R19	101	T		BSW	TL	√	741	245	7.5
	235/60R19	107	T	XL	BSW	TL	√	765	240	7.0
	245/55R19	103	T		BSW	TL	√	753	253	7.5
	255/45R19	104	H	XL	BSW	TL	√	713	255	8.5
20	255/55R19	111	H	XL	BSW	TL	√	763	265	8.0
	255/60R19	113	T	XL	BSW	TL	√	789	260	7.5
	265/55R19	109	T		BSW	TL	√	775	277	8.5
	255/55R20	110	H	XL	BSW	TL	√	788	265	8.0
	265/50R20	111	T	XL	BSW	TL	√	774	277	8.5
	265/55R20	113	T	XL	BSW	TL	√	800	277	8.5
	275/50R20	113	H	XL	BSW	TL	√	784	284	8.5
	275/60R20	115	T		BSW	TL	√	838	279	8.0
21	265/45R21	108	T	XL	BSW	TL	√	771	266	9.0
	275/50R21	113	H	XL	BSW	TL	√	809	284	8.5
	285/45R21	113	T	XL	BSW	TL	√	789	285	9.5
22	265/40R22	106	H	XL	BSW	TL	√	771	271	9.5

ARCTIC POWER


ARCTIC POWER is a set of winter tyres suitable for various terrains, suitable for northern winter, with excellent grip. Able to achieve absolute stability and balance under any weather conditions.



Features & benefits

- Dedicated, special designed studs for the middle tread and independent studs for shoulder areas, providing excellent longitudinal grip, the grip and handling performance on icy and snowy surfaces are strengthened greatly.
- The wide lateral grooves provide more sharp edges that can improve the traction and grip on snow, shorten the braking distance with power.
- Specialized minigrooves on the surface to improve the roughness for safer grip on ice/snow road.

M+S

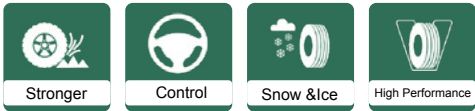

RANGE	13-21
SPEED RATE	H/T/V
ASPECT RATIO	35-70
SECTION WIDTH	175-285

ARCTIC POWER

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
13	175/70R13	82	T		BSW	TL	√	576	177	5.0
	175/65R14	86	T	XL	BSW	TL	√	584	177	5.0
	175/70R14	88	T	XL	BSW	TL	√	602	177	5.0
14	185/60R14	82	T		BSW	TL	√	578	189	5.5
	185/65R14	90	T	XL	BSW	TL	√	596	189	5.5
	185/70R14	92	T	XL	BSW	TL	√	630	201	6.0
15	185/60R15	88	T	XL	BSW	TL	√	603	189	5.5
	185/65R15	92	T	XL	BSW	TL	√	621	189	5.5
	195/60R15	92	T	XL	BSW	TL	√	615	201	6.0
	195/65R15	95	T	XL	BSW	TL	√	635	201	6.0
	205/65R15	99	T	XL	BSW	TL	√	647	209	6.0
	205/70R15	96	T		BSW	TL	√	669	209	6.0
16	205/55R16	94	T	XL	BSW	TL	√	632	214	6.5
	205/60R16	96	T	XL	BSW	TL	√	652	209	6.0
	205/65R16	99	T	XL	BSW	TL	√	672	209	6.0
	215/55R16	97	T	XL	BSW	TL	√	642	226	7.0
	215/60R16	99	T	XL	BSW	TL	√	664	221	6.5
	215/65R16	102	T	XL	BSW	TL	√	686	221	6.5
	215/70R16	100	T		BSW	TL	√	708	221	6.5
	235/70R16	106	T		BSW	TL	√	736	240	7.0
	245/70R16	111	T	XL	BSW	TL	√	750	248	7.0
17	215/50R17	95	T	XL	BSW	TL	√	648	226	7.0
	215/55R17	98	T	XL	BSW	TL	√	668	226	7.0
	215/60R17	100	T	XL	BSW	TL	√	690	221	6.5
	225/45R17	94	T	XL	BSW	TL	√	634	225	7.5
	225/50R17	98	T	XL	BSW	TL	√	658	233	7.0
	225/55R17	101	T	XL	BSW	TL	√	680	233	7.0
	225/60R17	103	T	XL	BSW	TL	√	702	228	6.5
	225/65R17	106	T	XL	BSW	TL	√	724	228	6.5
	235/55R17	103	T	XL	BSW	TL	√	690	245	7.5
	235/65R17	108	T	XL	BSW	TL	√	738	240	7.0
18	265/65R17	112	T		BSW	TL	√	776	272	8.0
	215/55R18	99	T	XL	BSW	TL	√	693	226	7.0
	225/45R18	95	T	XL	BSW	TL	√	659	225	7.5
	225/55R18	102	T	XL	BSW	TL	√	705	233	7.0
	225/60R18	104	T	XL	BSW	TL	√	727	228	6.5
	235/45R18	98	T	XL	BSW	TL	√	669	236	8.0
	235/55R18	104	T	XL	BSW	TL	√	715	245	7.5
	235/60R18	107	T	XL	BSW	TL	√	739	240	7.0
	245/45R18	100	T	XL	BSW	TL	√	677	243	8.0
	255/55R18	109	T	XL	BSW	TL	√	737	265	8.0
	265/60R18	114	T	XL	BSW	TL	√	775	272	8.0
	265/65R18	116	T	XL	BSW	TL	√	801	272	8.0
	285/60R18	120	T	XL	BSW	TL	√	799	292	8.5

ARCTIC POWER

Rim (inch)	Tire Size	Load Index	Speed Symbol	XL	Sidewall Style	TL/TT	ECE	Overall Diam (mm)	Section Width (mm)	Standard Rim
19	225/45R19	96	T	XL	BSW	TL	√	685	225	7.5
	225/55R19	103	T	XL	BSW	TL	√	731	233	7.0
	235/50R19	103	T	XL	BSW	TL	√	719	245	7.5
	235/55R19	105	T	XL	BSW	TL	√	741	245	7.5
	245/40R19	98	T	XL	BSW	TL	√	679	248	8.5
	245/45R19	102	H	XL	BSW	TL	√	703	243	8.0
	255/45R19	104	V	XL	BSW	TL	√	713	255	8.5
	255/50R19	107	T	XL	BSW	TL	√	739	265	8.0
	255/55R19	111	T	XL	BSW	TL	√	763	265	8.0
	265/55R19	113	T	XL	BSW	TL	√	775	277	8.5
20	275/35R19	100	V	XL	BSW	TL	√	675	278	9.5
	245/45R20	103	T	XL	BSW	TL	√	728	243	8.0
	245/50R20	105	T	XL	BSW	TL	√	754	253	7.5
	255/40R20	101	T	XL	BSW	TL	√	712	260	9.0
	255/45R20	105	H	XL	BSW	TL	√	738	255	8.5
	265/50R20	111	T	XL	BSW	TL	√	774	277	8.5
	265/55R20	114	T	XL	BSW	TL	√	800	277	8.5
	275/50R20	113	T	XL	BSW	TL	√	784	284	8.5
21	275/60R20	116	T	XL	BSW	TL	√	838	279	8.0
	285/50R20	116	T	XL	BSW	TL	√	794	297	9.0
	235/50R21	104	T	XL	BSW	TL	√	769	245	7.5
	255/45R21	106	T	XL	BSW	TL	√	763	255	8.5
	265/45R21	108	T	XL	BSW	TL	√	771	266	9.0
	275/45R21	110	T	XL	BSW	TL	√	781	273	9.0





ENJOY YOUR TRIPS WITH WINDFORCE TYRES

WWW.LANDSPIDERTIRE.COM